


fusibili 6,3x32 CF rapidi 250V

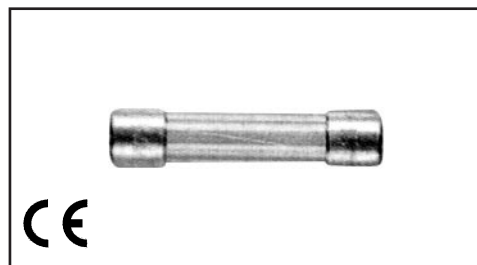

Tubetto in vetro



Potere di interruzione = L 35A

Secondo le norme
IEC 127 - 2/IV

CORRENTE NOMINALE

CADUTA TENSIONE mV

| | | |
|------|----|------|
| 100 | mA | 6000 |
| 25 | mA | 5500 |
| 125 | mA | 5000 |
| 200 | mA | 4500 |
| 250 | mA | 3500 |
| 315 | mA | 3000 |
| 400 | mA | 2500 |
| 500 | mA | 2000 |
| 800 | mA | 1500 |
| 1 | A | 500 |
| 1,25 | A | 400 |
| 1,6 | A | 400 |
| 2 | A | 300 |
| 2,5 | A | 250 |
| 3,15 | A | 250 |
| 4 | A | 250 |
| 5 | A | 200 |
| 6,3 | A | 200 |
| 8 | A | 200 |
| 10 | A | 200 |
| 12 | A | 200 |
| 16 | A | 200 |
| 20 | A | 200 |
| 25 | A | 200 |

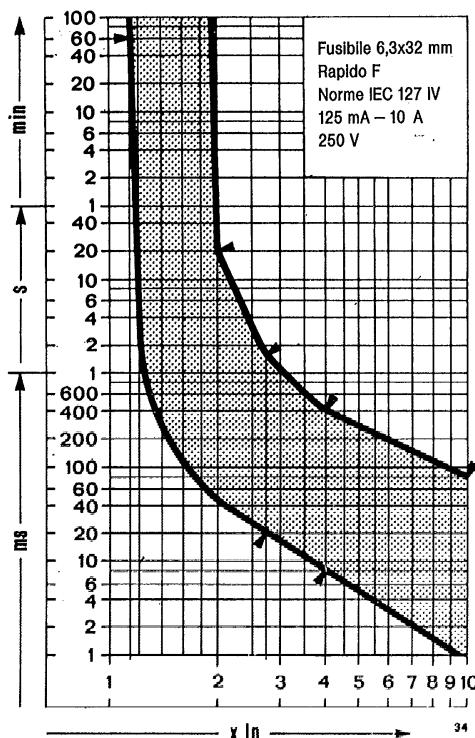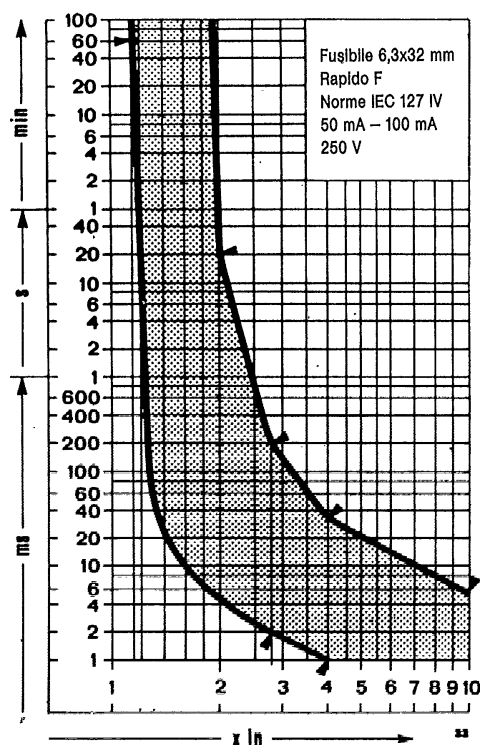

Caratteristiche di fusione

| Corrente nominale I_n | Corrente di prova | | | | |
|-------------------------------|-------------------|----------------|-------------------|----------------|-----------------|
| | $1,15 \times I_n$ | $2 \times I_n$ | $2,75 \times I_n$ | $4 \times I_n$ | $10 \times I_n$ |
| 50 mA - 100 mA | > 1 h | < 20 s | 2 ms - 200 ms | 1 ms - 30 ms | < 5 ms |
| 125 mA - 10 A | > 1 h | < 20 s | 20 ms - 1,5 s | 8 ms - 400 ms | < 80 ms |