



Part No.:Hi-05A4SWUTC-062N01E

Outline Dimensions


19/04350-00

§ Standard 5mm diameter package.

Characters

§ High intensity.

ITEM	MATERIALS
Resin(Mold)	Epoxy
Lens Color Code	C Water Transparent
	T Colored Transparent
	D White Diffused
	E Colored Diffused
Lead Frame	Ag Plating Iron Alloy
Dice	InGaN

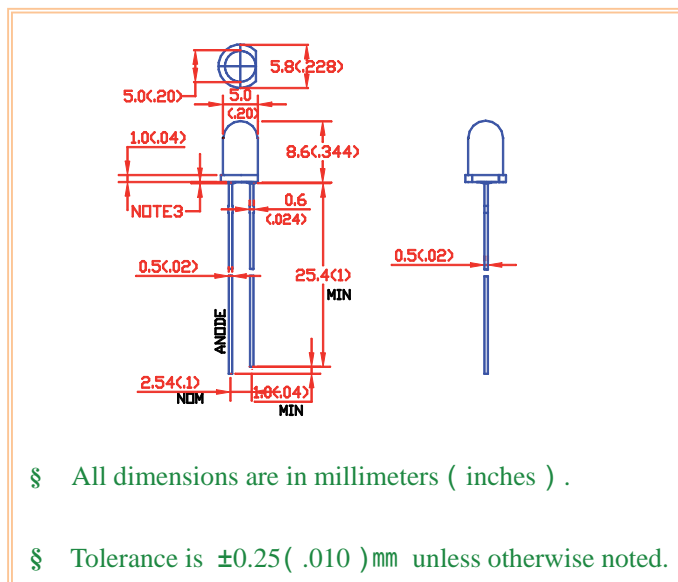


Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Item	Symbol	Value	Unit
Power Dissipation	PD	120	mW
DC Forward Current	IF	30	mA
Pulsed Forward Current	IFP	100*	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	260for5sec Δ	°C

* Duty 1/10 Pulse Width 0.1ms Δ At the position of 4mm from the bottom of the package

Directive Characteristics ($T_a=25^\circ\text{C}$)

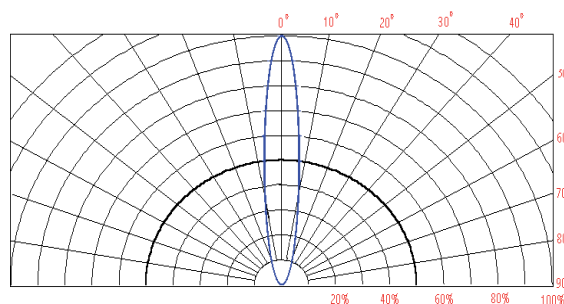

Electrical-Optical Characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Value			Unit	Test condition
		Min.	Typ.	Max.		
Forward Voltage	Vf	---	3.0	3.4	V	If=20mA
Luminous intensity	Iv	10000	---	14000	mcd	If=20mA
Wavelength	λ (λ_d)	---	0.2960	---	(nm)	If=20mA
	y	---	0.2836	---	---	If=20mA
Reverse Current	Ir	---	---	5	μA	Vr=5V
Viewing angle	2 $\theta_{1/2}$	---	15	---	Deg	If=20mA
Spectral half bandwidth	$\Delta\lambda$	---	---	---	nm	If=20mA