

DESCRIPTIONS:

- Zinc alloy die cast housing and cylinder. Chrome plated.
- 5-Disk tumblers mechanism.
- Reversible double cut key brass made nickel plated.
- Silver plated contacts and terminals.
- 2 Positions (off-on) 4 Terminals. (2NO. 2NC)
- 2 Positions (on-on) 4 Terminals. (1NO. 1NC)
- 150 Combinations available.

SPECIFICATIONS:

- Contact Rating: 4A 125VAC 2A 250VAC.
- Contact Resistance: 10 Milli-Ohms Max
- Insulation Resistance: 500 Meg-Ohms Min. (500 VDC)
- Dielectric Strength: 1500 VAC-1 Minute.

KEY-PULL FIGURES

o-Off Position

■-Indicates Key-Pull

●-Indicates No Key-Pull


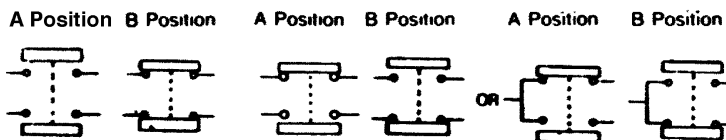


Fig.1



Fig.2




Fig.3



Fig.4

	Fig. No	Pole	Positions	Terminals	Key Pulls	Turn	① ⊖	Type
	1	2	2	4	1	90°	Off On	DPST
35/1713	2	2	2	4	2	90°	Off On	DPST
	3	1	2	4	1	90°	On On	SPDT
	4	1	2	4	2	90°	On On	SPDT

