

DESCRIPTIONS:

- Zinc alloy die cast housing and cylinder.
- 5-Disk tumblers mechanism.
- Reversible double cut key. Brass made. Nickel plated.
- With dust shutter.
- Silver plated contacts and terminals.
- 2 Positions (off-on), 2 Terminals (off-on type).
- Used for: Alarms, security systems, cars, garages etc.
- 150 Combinations available.

SPECIFICATIONS:

- Contact Rating: 4A 125VAC, 2A 250VAC.
- Contact Resistance: 10 Milli-Ohms Max.
- Insulation Resistance: 500 Meg-Ohms Min. (500 VDC)
- Dielectric Strength: 1500 VAC-1 Minute.

KEY-PULL FIGURES

o-Off Position

■-Indicates Key-Pull

●-Indicates No Key-Pull




Fig.1




Fig.2

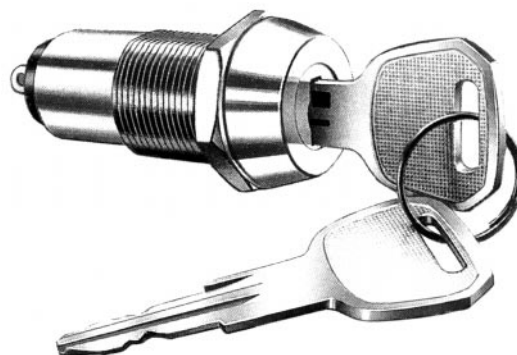


	Fig. No	Pole	Positions	Terminals	Key Pulls	Turn	⬆ ⬇	Type
	1	1	2	2	1	90°	Off On	SPST
35/1717	2	1	2	2	2	90°	Off On	SPST
	1	1	2	2	1	90°	Off (On)	SPST

* (): Momentary Contact

Unit: mm
HOLE SIZE

