



## micro-fusibili MT ritardati 250V

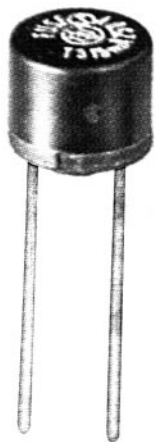


**Corpo termoplastico  
autoestinguente nero**

**Potere di interruzione  
35A~**

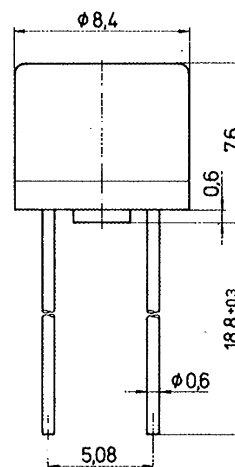

CORRENTE NOMINALE	$I_t$ A <sup>2</sup> S	CADUTA TENSIONE mV
----------------------	---------------------------	-----------------------

50 mA	0,09	500
63 mA	0,098	480
80 mA	0,16	400
100 mA	0,02	350
125 mA	0,39	300
160 mA	0,075	280
200 mA	0,2	260
250 mA	0,36	240
315 mA	0,58	220
400 mA	1,8	200
500 mA	2,5	190
630 mA	4	180
800 mA	6,5	160
1 A	8	140
1,25 A	14	130
1,6 A	22	120
2 A	26	100
2,5 A	38	100
3,15 A	60	100
4 A	67	100

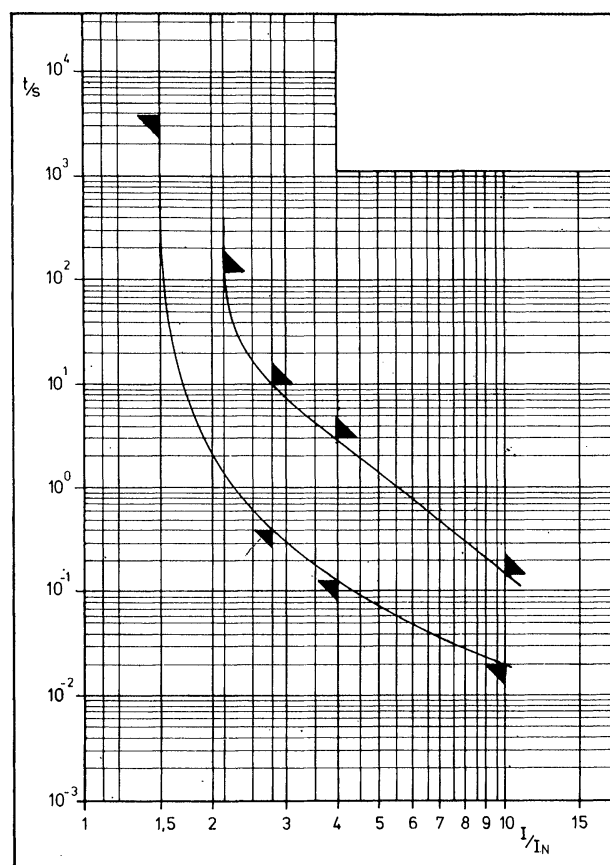

### Caratteristiche di fusione

Corrente nominale $I_n$	Corrente di prova				
	$1,5 \times I_n$	$2,1 \times I_n$	$2,75 \times I_n$	$4 \times I_n$	$10 \times I_n$
50 mA - 4 A	> 1 h	< 30 min	400 ms - 10 s	150 ms - 3 s	20 ms - 150 ms