

SPECIFICATIONS:

- Contact Rating: 1A 125VAC, 0.5A 250VAC.
- Contact Resistance: $\leq 0,02\Omega$
- Insulation Resistance: ≥ 200 Meg-Ohms (500 VDC)
- Withstand Voltage: 500 VAC
- Life 10000 Cycles

KEY-PULL FIGURE

○—Off Position

■—Indicates Key-Pull




Fig.1

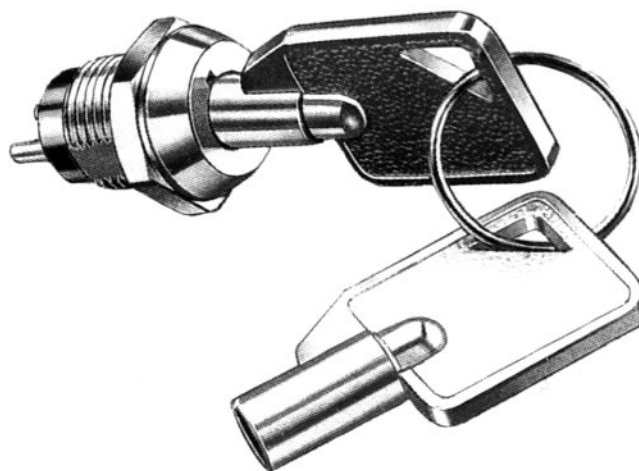


	Fig. No	Pole	Positions	Key Pulls	Turn	⬆ ⬇
35/1700	1	1	2	2	90°	Off On*

Unit: mm

