

Passive video Balun Model FS-4301VP

Features:

1-CH Passive Video & Power Transceiver (12V/24V DC/AC)

- Color video signal up to 1300ft(400m) via UTP cat5e/6
- Transmit power signal up to 750ft(250m)
- Male BNC with extended mini-coax pigtail
- RJ45 Jack for UTP cable
- NTSC, PAL & SECAM video format compatible
- Real-time transmission
- No power required
- Exceptional interference rejection
- Built-in TVS for surge protection
- Lightning protection design Grade:III
- 50 dB crosstalk and noise immunity
- Wave Filter Design, Anti-Static Design
- Compact size and easy installation
- ABS Engineering plastic housing



Overview:



The FS-4301VP video balun is a passive (non-amplified) device that allows the transmission of real-time CCTV video signal via cost-effective

Unshielded Twisted Paired(UTP) cable. Baseband (composite) signals of any type are support.

Used in pairs, FS-4301VP eliminates costly and bulky coaxial cable, allowing live CCTV color video signal up to 1300ft (400m), power transmission up to 750ft (250m). FS-4301VP is also compatible with all the other passive transceiver for application at distance up to 1300ft (400m) and active receiver up to 2200ft (700m).

The superlial interference rejection and low emissions of the FS-4301VP allow video signals to coexist in the same wire bundle as telephone, datacom, or low-voltage power circuits.

This allows the use of a shared or existing cable plant.

FS-4301VP has built-in surge suppression to protect video equipment against damaging voltage spikes.

Its crosstalk and noise immunity ensure quality video signals.

Applications:

- Security Monitoring System
- Multimedia Network Teaching System
- Medical Monitoring Display System
- Industrial Automation Control System
- Banking, securities, financial information display system
- Remote Network Server Monitoring
- Department Store Security
- Casino Security
- Hospitals, Airports and banks
- School Campuses

Passive video Balun Model FS-4301VP

Wire and Cable Recommendations:

FS-4301VP is recommended to use with Unshielded Twisted Paired (UTP) wiring from 24AWG through 22AWG.

Individually shielded pairs should be avoided, as they reduce the operating range of the systems drastically.



Multi-pair cable (25-pair or more) with an overall shield are acceptable.

Video signals can coexist in the same wire bundle as telephone, datacom, or low-voltages power circuits.

While video may be routed through telephone punch-down block terminals, any bridge-taps, also called T-taps and any resistive, capacitive or inductive devices MUST BE removed from the pair.

For more specific information regarding wire types, gauges and proper installation techniques, please contact us for technical assistance.

	1	2	3	4	5	6	7	8
T568A:	White Green	Green	White Orange	Blue	White Blue	Orange	White Brown	Brown
T568B:	White Orange	Orange	White Green	Blue	White Blue	Green	White Brown	Brown

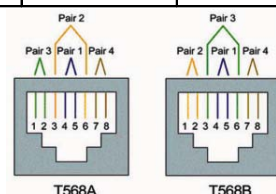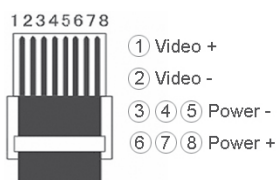

Technical Specifications:

Product Name		Single Channel Passive Video and Power Transceiver (FS-4301VP)
Applied Devices		CCTV cameras, monitors, DVR, switchers, IP encoders, and other CCTV equipment
Video	Video Format	PAL, NTSC, SECAM
	Operating Frequency	DC to 5MHz
	Max Distance	UTP Category 5e (24AWG) Color: 1300ft(400m) B&W: 1950ft(600m)
	Common-mode/Differential-mode rejection	15 KHz to 5 MHz 60 dB typ
	Impedance	Coax, Male BNC 75Ω unbalanced UTP,RJ45 100Ω balanced
Wire Type	Attenuation	1.5 dB typ Max
	Network Wiring	One Unshielded Twisted Pair (for each video signal) 24-16 AWG (0.5-1.31mm)
	Category Type	2 or better
	Impedance	100 ± 20 ohms
	DC Loop Resistance	52 ohms per 1,000ft (18 ohms per 100m)
Power	Differential Capacitance	19 pF/ft max (62 pF/m max)
	Power Input	No external power required
Connector	Power transmission	12V/24V,DC/AC, up to 750ft(250m) via UTP cat5e/6
	Video input/output	Male BNC connector
Protection	Video input/output	RJ45 Jack
	Surge Protection	renewable solid state surge protection
	Video Input	2KV(common mode), 10/700us IEC6100-4-5/1955(GB/T 1726, 5-1999)
Mechanical	Video Output	2KV(different mode), 10/700us IEC6100-4-5/1955(GB/T 1726, 5-1999)
	Housing	ABS engineering plastic
	Body Color	Black
	Dimensions(L*W*H)	60.4*29*20.4mm (BNC connector & cable excluded)
Environmental	Net Weight	60g
	Operating Temperature	-20° + 70° C
	Relative Humidity	0~95% (non-condensing)
	Storage Temperature	-40° + 150° C

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY
 Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: info@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.
 The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to thr performances and the usa of the product.
 La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.

Passive video Balun Model FS-4301VP

Application Diagram:

Diagram 1 **FS-4301VP + FS-4301VP**
(transmitter unit) (receiver unit)

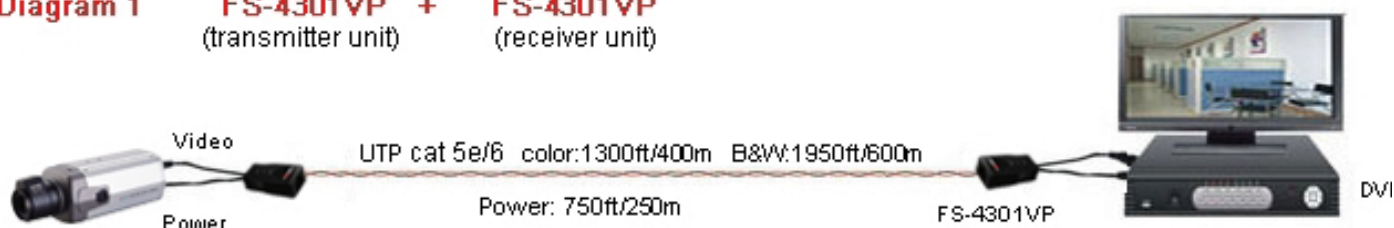


Diagram 2 **FS-4301VP + FS-4616VPS**

