


## DEVIATORE UNIPOLARE ROCKER SWITCH (3P) 2POS ON-ON 16A

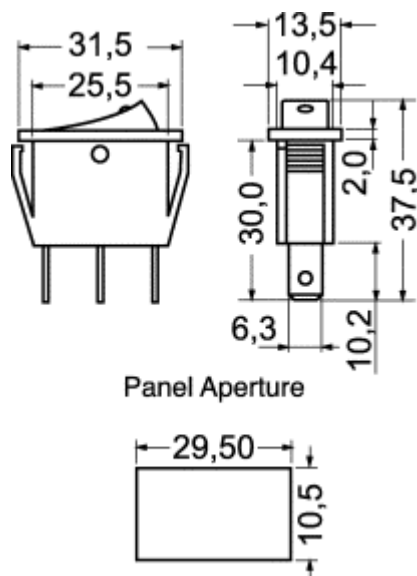

Contact Resistance	20m ,MAX
Insulation Resistance	500VDC,50M
Dielectric Strength	1250VAC,1MIN
Operating Temperature	T100
Electrical Life	10,000 Cycles
Operating Data	16A - 250VAC

PORT.: 16 A-250 V  
 CORPO: abs  
 COLORE CORPO: nero  
 TEMP. LAV.: -20°C ÷ 125°C  
 CONTATTI: argento  
 FISS. PANN.: autobloccante  
 TERMIN.: faston passo 6,35  
 PER FASTON: [4/11520](#)  
 COPRIFASTON: [4/11530](#)  
 PUNZONE: [7/2528](#)

Conforme alle normative:

