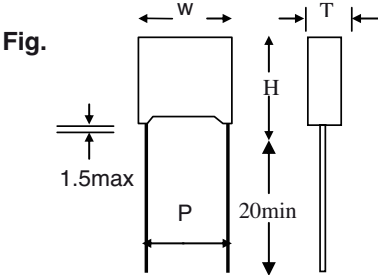
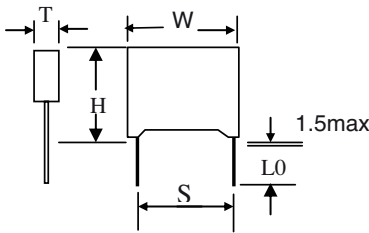


## PRODUCT SPECIFICATIONS

CUSTOMER :
CUSTOMER'S REFERENCE : <b>3/34xx 3/35xx 3/36xx Series</b>
DESCRIPTIONS : <b>METALLIZED POLYESTER FILM CAPACITOR-BOX</b>
SHENGXIN TYPE : <b>CL21-B series</b>
<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  <p>Fig. 1</p> </div> <div style="text-align: center;">  <p>Fig. 2</p> </div> </div>

### 1. PRODUCT DIMENSIONS :




unit : mm

CUSTOMER'S PART NO.	CAP nF	Tol. ±%	R.V. VDC	T.V. VDC	W ±0.5	H ±0.5	T ±0.5	P ±1.0	S ±0.5	dψ ±0.05	L0 ±0.5	LL MIN	Fig.	SHENGXIN PART NO.
3/3414	470,0	10	250	440	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 474K250VDC
3/3416	680,0	10	250	440	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 684K250VDC
3/3418	1000,0	10	250	440	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 105K250VDC
3/3624	100,0	10	630	1100	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 104K630VDC
3/3628	220,0	10	630	1100	26,5	16,0	7,0	22,5		0,8		20,0	1	CL21-B 224K630VDC
3/3652	220,0	10	400	700	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 224K400VDC
3/3656	330,0	10	400	700	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 334K400VDC
3/3662	470,0	10	400	700	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 474K400VDC
3/3674	1,50 μF	10	100	175	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 155K100VDC
3/3682	2,20 μF	10	100	175	26,5	15,0	6,0	22,5		0,8		20,0	1	CL21-B 225K100VDC
3/3688	3,30 μF	10	63	110	26,5	16,5	7,0	22,5		0,8		20,0	1	CL21-B 335K63VDC
3/3690	3,30 μF	10	100	175	26,5	16,0	7,0	22,5		0,8		20,0	1	CL21-B 335K100VDC
3/3696	4,70 μF	10	63	110	26,5	17,0	8,5	22,5		0,8		20,0	1	CL21-B 475K63VDC



## PRODUCT SPECIFICATIONS

TYPE : **CL21-B**

NO.	ITEM	DESCRIPTIONS
1.	<b>SCOPE</b>	This specifications cover the requirements of SHENGXIN's Metallized Polyester Film Capacitor-BOX, Type : CL21-B
2.	<b>STANDARD ATMOSPHERIC CONDITIONS FOR MAKING MEASUREMENTS</b>	
2.1.	AMBIENT TEMPERATURE	15°C to 35°C (If there is any doubt on the results, the measurements shall be made at +20 +/- 5°C.)
2.2.	RELATIVE HUMIDITY (R.H.)	45% to 75% (If there is any doubt on the results, the measurements shall be made at 60% to 70%.)
2.3.	AIR PRESSURE	86 kpa to 106 kpa.
2.4.	OPERATING TEMPERATURE RANGE	-55°C to +105°C for which the capacitor can be operated continuously at rated voltage.
3.	<b>CONSTRUCTION</b>	
3.1.	DIELECTRIC	Metallized Polyester Film
3.2.	METAL SPRAY	Special Solder
3.3.	LEAD WIRE	Copper-clad Steel Wire
3.4.	INNER COATING	Epoxy Resin
3.5.	OUTER COATING	PLastic Case
		
4.	<b>MARKING</b>	
4.1.	MANUFACTURER'S SYMBOL	 stands for SHENGXIN.
4.2.	NOMINAL CAPACITANCE	"474" for "470nF"
4.3.	TOLERANCE	"K" for "±10%"
4.4.	RATED VOLTAGE	in VDC rating, unless otherwise indicated.
4.5.	MARKING COLOR	Black
		



5. ELECTRICAL CHARACTERISTICS				
NO.	ITEM		PERFORMANCE	TEST CONDITIONS
5.1.	Withstand Voltage (TV)	Between Terminals	Shll be no abnormality.	Apply 150% of rated voltage for 60 sec., or 175% of rated voltage for 1~5 sec. at +20 +/- 5°C. The charging current must be <= 1 Amp.
		Between Terminals & Enclosure	Shll be no abnormality.	Apply 200% of rated voltage for 2 to 5 sec.
5.2.	Insulation Resistance (I.R.)		>= 7,500 MOhm (C <= 0.33 uF) >= 2,500 MOhm*uF/C (C > 0.33 uF)	Apply Vt +/- 15% for 60 +/- 5 sec. at +20 +/- 5°C. Vt = 50 VDC if rated voltage <= 100 VDC; Vt = 100 VDC if 100 VDC < rated voltage <= 500 VDC; Vt = 500 VDC if rated voltage > 500 VDC.
5.3.	Capacitance (CAP)		Within the tolerance specified. (at +20 +/- 5°C).	Measuring Frequency : 1 KHz +/- 10%. Measuring Voltage : <= 1 Vrms.max.
5.4.	Dissipation Factor (DF)		<= 0.010 (1.0%) at 1 KHz.	Measuring Frequency : 1KHz +/- 10% Measuring Voltage : <= 1 Vrms.max.
5.5.	Connection of Element		Shall be no open nor short-circuiting. The connection shall be stable. DF shall be <= 0.010 (1.0%) at 1 KHz.	Apply 200% of rated voltage for 10 times.

## PRODUCT SPECIFICATIONS

TYPE : **CL21-B**

5.6.	Solderability		More than 90% of circumferential surface of lead wire shall be covered with new solder.	Testing method per IEC 68-2-20 Ta. Soldering temperature : +235 +/- 5°C. Immersion duration : 2 +/- 0.5 sec.
6. MECHANICAL CHARACTERISTICS				
NO.	ITEM		PERFORMANCE	TEST CONDITIONS
6.1.	Terminal Strength	Tensil	Shall be no abnormality.	Testing method per IEC 68-2-21. Apply 1.0 kg for 10 +/- 1 sec. to the terminal in the axial direction, and acting in a direction away from the body.
		Bending	Shall be no abnormality.	Apply 0.5 kg for 2 cycles. Each cycle includes: 90° once, return to its initial position for 2-3 sec., and then to the opposite direction once.
7. ENDURANCE CHARACTERISTICS				
NO.	ITEM		PERFORMANCE	TEST CONDITIONS
7.1.	Temperature Cycle	Appearance	Shall be no remarkable change.	Test Temperature Cycle : Total 5 cycles. Each cycle includes : 1. +20 +/- 2°C for 3 min. 2. -55 +0/-3 °C for 30 min. 3. +20 +/- 2°C for 3 min. 4. +105 +3/-0 °C for 30 min. 5. +20 +/- 2°C for 3 min.
		Withstand Voltage	Shall satisfy No. 5.1.	
		Capacitance Change Rate (Δ C/C)	Within +/- 3% of the value before test.	
		Dissipation Factor	Tanδ :1.2% max.(1KHz)	
		Insulation Resistance (I.R.)	>= 50% of the limit value of No. 5.2.	



NO.	ITEM	PERFORMANCE	TEST CONDITIONS
7.2.	High Temperature Loading	Appearance	Testing method per IEC 6038-17. Refer to JIS C 5102-1994. Test Temperature : +105 +/-2 °C. Apply 140% of rated voltage for 240 +8/-0hrs; After test, allow it stay alone for 1.5+/- 0.5 hrs at standard temperature and humidity before making measurements.
		Withstand Voltage	
		Capacitance Change Rate ( $\Delta C/C$ )	
		Dissipation Factor	
		Insulation Resistance (I.R.)	
7.3.	Damp Heat Loading	Appearance	Refer to JIS C 0022. Test temperature :+40 +/- 2? Test humidity : 90% to 95% R.H. Test voltage : rated voltage. Test duration : 500 +24/-0 hrs. After test, allow it stay alone for 1.5+/- 0.5 hrs at standard temperature and humidity before making measurements.
		Withstand Voltage	
		Capacitance Change Rate ( $\Delta C/C$ )	
		Dissipation Factor	
		Insulation Resistance (I.R.)	
7.4.	Soldering Heat Resistance	Appearance	Testing method per IEC 68-2-20 Tb. Soldering Temperature : +270 +/- 5°C. Immersion Duration : 3 +/- 0.5 sec. Immersion Deepth : 4 +/- 0.8 mm from roots. After test, allow it stay alone for 1.5 +/- 0.5 hrs. at standard temperature and humidity before making measurements.
		Withstand Voltage Between Terminals	
		Capacitance Change Rate ( $\Delta C/C$ )	
		Dissipation Factor	
		Insulation Resistance (I.R.)	
		Connection of Element	
7.5.	Dry Heat Resistance	Appearance	Test Temperature : +105 +/- 2°C Test Duration : 16 +/-0 hrs.
		Withstand Voltage	
		Capacitance Change Rate ( $\Delta C/C$ )	
		Dissipation Factor	
		Insulation Resistance (I.R.)	









**PRODUCT SPECIFICATIONS****TYPE : CL21-B**

7.6.	Cold Resistance	Appearance	Test Temperature : -55 +/-2 °C Test Duration : 2 +/-1 hrs.
		Withstand Voltage	
		Capacitance Change Rate ( $\Delta C/C$ )	
		Dissipation Factor	
		Insulation Resistance (I.R.)	



NO.	ITEM		PERFORMANCE	TEST CONDITIONS
7.7.	Humidity Resistance	Appearance	Shall be no remarkable change.	Testing method per IEC 68-2-3 Ca. Refer to JIS C 0022. Test Temperature : +40 +/- 2°C. Test Humidity : 90% to 95% R.H. Test Duration : 500 +24/-0 hrs After test, allow it stay alone for 1.5 +/- 0.5 hrs at standard temperature and humidity before making measurements.
		Withstand Voltage	Shall satisfy No. 5.1.	
		Capacitance Change Rate (Δ C/C)	Within +/- 10% of the value before test.	
		Dissipation Factor	Tanδ :1.2% max.(1KHz)	
		Insulation Resistance	>= 50% of the limit value of No. 5.2.	
7.8.	Vibration Resistance	Connection Strength	Shall be no open nor short-circuiting. The connection shall be stable.	Testing method per IEC 68-2-6 Fc. Frequency Change : 10--55--10 Hz. Vibration Distance : 1.5 mm. Test Direction : X, Y, Z. Test Duration : 2 hrs +1/-0 each direction.
		Appearance	Shall be no mechanical damage.	
7.9.	Rapid Temperature Change	Appearance	Shall be no remarkable change.	Testing method per IEC 68-2-14 Na. Test Temperature Cycle : Total 5 cycles. High Temperature : +105 +5/-5 °C Low Temperature : -55 +5/-5°C 30 min +/- 10% for each temperature.
		Withstand Voltage	Shall satisfy No. 5.1.	
		Capacitance Change Rate (Δ C/C)	Within +/- 3% of the value before test.	
		Dissipation Factor	Tanδ :1.0% max.(1KHz)	
		Insulation Resistance	>= 50% of the limit value of No. 5.2.	
8. ACCEPTABLE QUALITY LEVEL (AQL)				
NO.	ITEM		AQL	SAMPLING PLAN
8.1.	Appearance AQL		0,65	According to MIL-STD-105E level II. By lot outgoing inspection.
8.2.	Dimension AQL		0,65	
8.3.	Mechanical Characteristics AQL		0,40	
8.4.	Electrical Characteristics AQL		0,04	
	CAP, DF,  TV, IR,		Zero Defect	

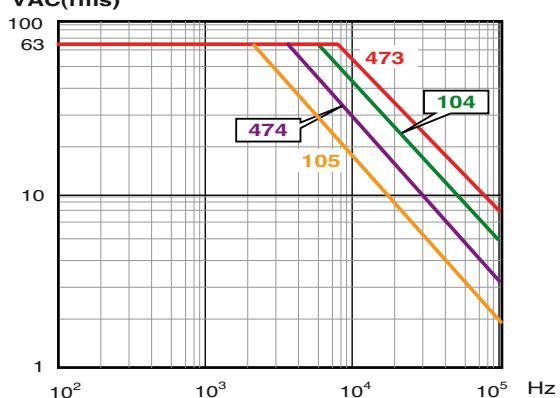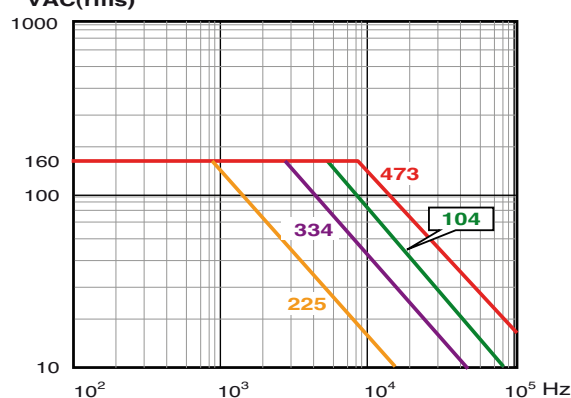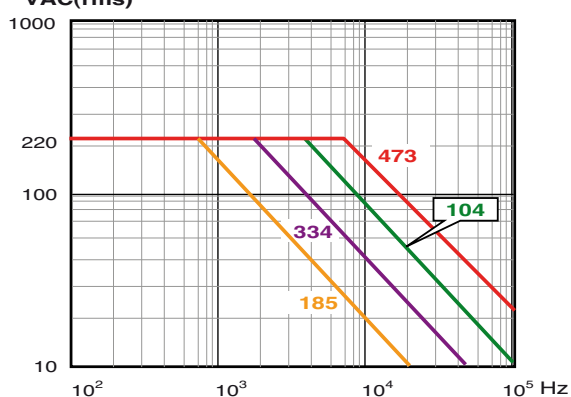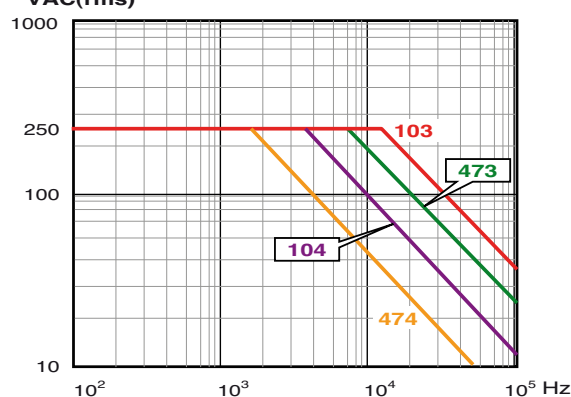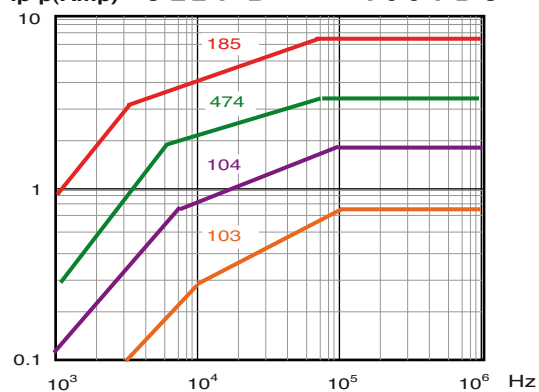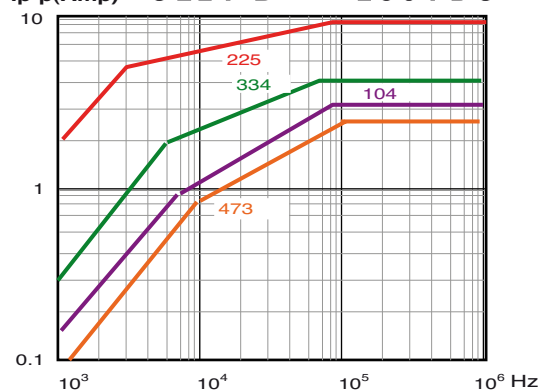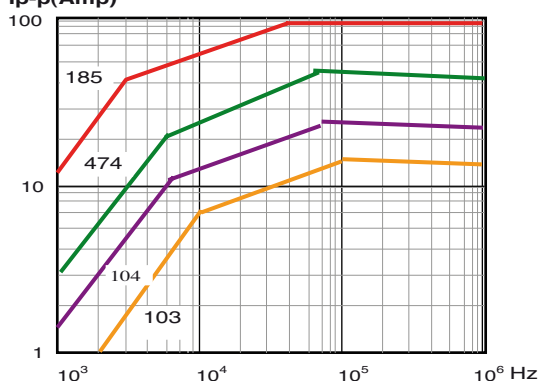
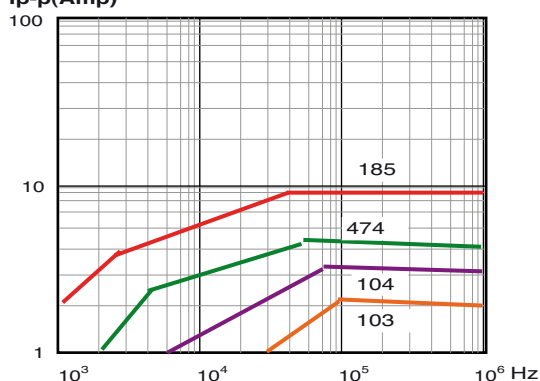


**Permissible AC Voltage VS Frequency Curve****CL21-B****VAC(rms) 100VDC / 63VAC****VAC(rms) 250VDC / 160VAC****VAC(rms) 400VDC / 220VAC****VAC(rms) 630VDC / 250VAC****Permissible Pulse Current VS Frequency Curve****CL21-B****Ip-p(Amp) CL21-B 100VDC****Ip-p(Amp) CL21-B 250VDC****Ip-p(Amp) CL21-B 400VDC****Ip-p(Amp) CL21-B 630VDC**





## CHARACTERISTICS REFERENCE

## Soldering Temperature VS Time

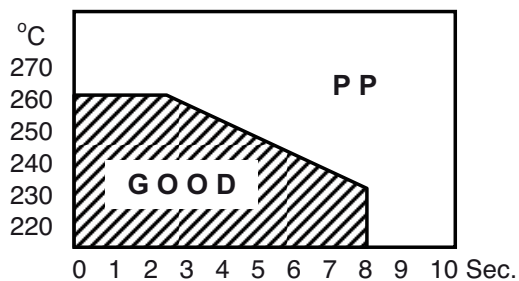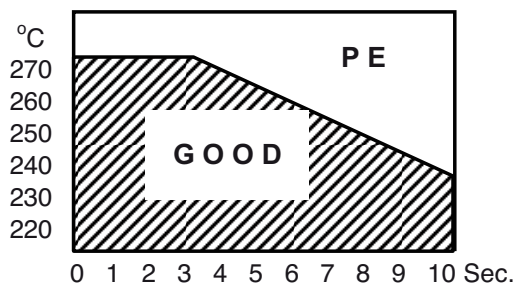

## Frequency Characteristics

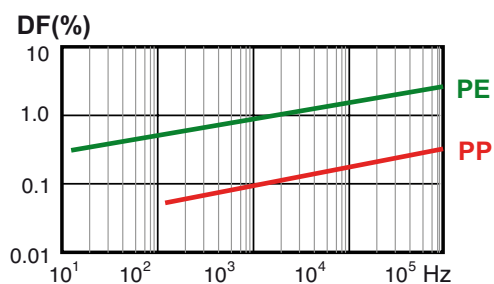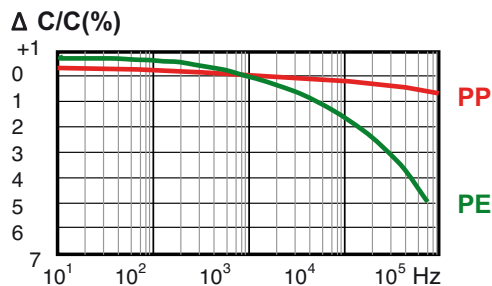

## Temperature Characteristics

