


1. Contact rating: AC 125V 6A; AC 250V 3A
2. Contact R: 20mΩ Max

3. Insulation R: 1000 MΩ Min
4. Dielectric strength: AC 1500V, 1 minute

5. Operating temperature: -55 °C ~ 85 °C
6. Electrical life: 20,000 Cycles

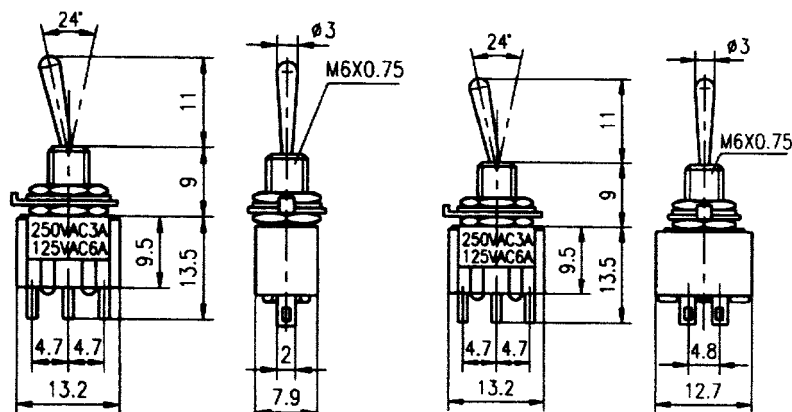


4/6595


Circuitry trait			Type	Terminals
ON	—	OFF	SPST	2P
ON	—	ON	SPDT	3P
ON	—	(ON)	SPDT	3P
ON	OFF	ON	SPDT	3P
ON	OFF	(ON)	SPDT	3P
ON	OFF	(ON)	SPDT	3P

Circuitry trait			Type	Terminals
ON	—	OFF	DPST	4P
ON	—	ON	DPDT	6P
ON	—	(ON)	DPDT	6P
ON	OFF	ON	DPDT	6P
ON	OFF	(ON)	DPDT	6P
(ON)	OFF	(ON)	DPDT	6P


Handle options

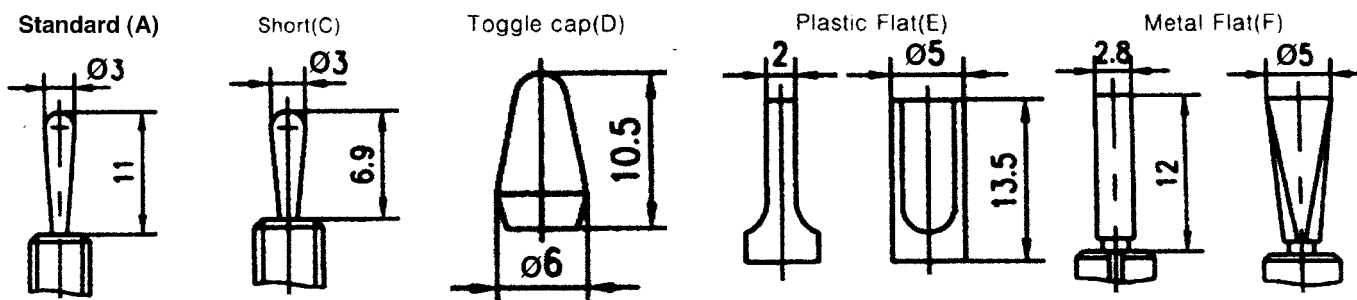


Terminal options

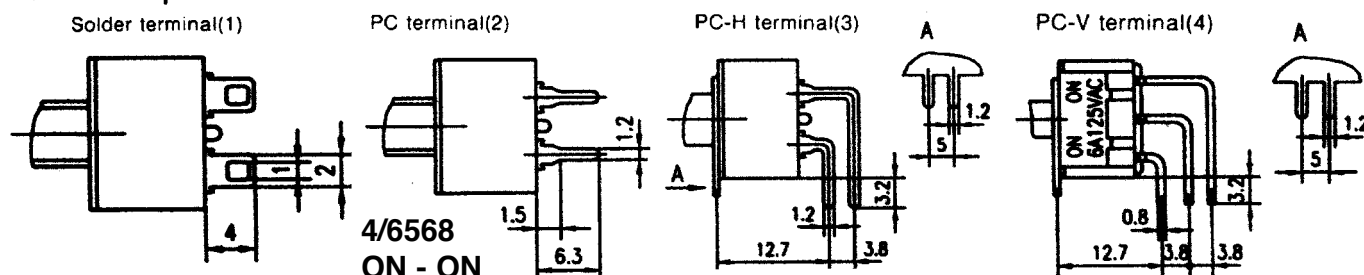

4/6595÷4/6596
ON - OFF - ON

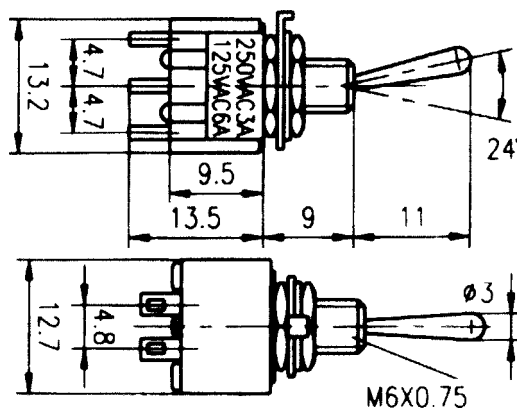

Affix Annex Nameplate



ON	—	OFF
ON	—	ON
ON	OFF	ON