


Ordering Information:



Specification:


1. Rating: 4 A - 28 VDC
2. Contact R: 20m Ω Max
3. Insulation R: DC 500V 1000M Ω Min
4. Dielectric strength: AC 1000V, 1 Minute
5. Operating Temperature: - 20°C ~ +65°C
6. Electrical Life: 20,000 Cycles

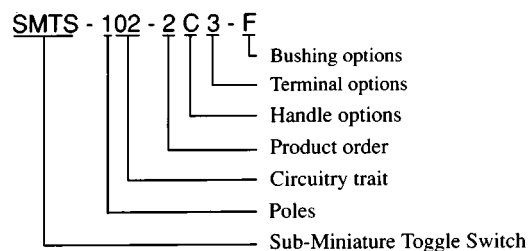


Circuitry trait

01	ON	-	OFF
02	ON	-	ON
03	ON	OFF	ON
13	ON	OFF	(ON)
(): Indicates Momentary			


Handle options

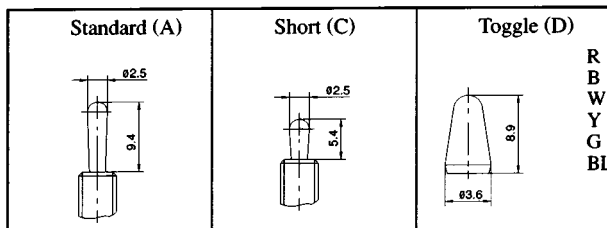


Nameplate

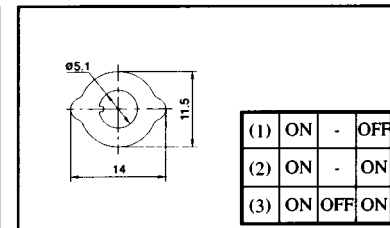

Bushing options

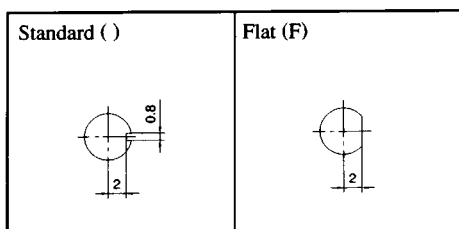

Terminal options

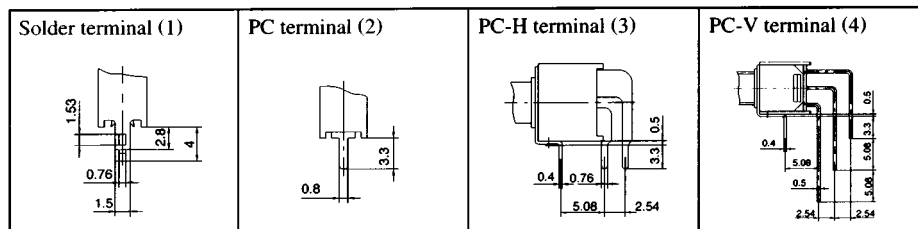

4/6581
ON-ON

