

Rating: DM1 1A 125VAC
DM3 3A 125VAC

Insulation Resistance: >100M Ω DC500V

Withstand Voltage: AC 500V 1minute

Contacts Resistance: <30m Ω

Soldering Temperature: 255°C max. 5 sec



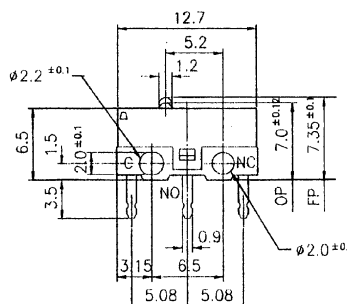










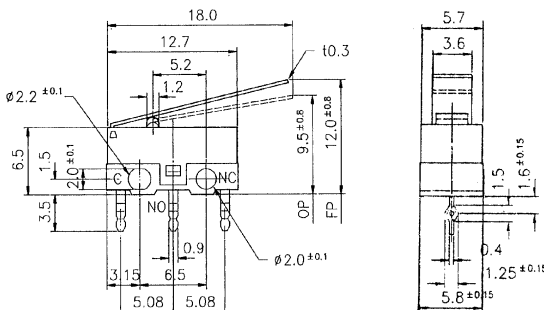

Mechanical Life: 1,000,000 cycles

Electrical Life: 100,000 cycles

Ambient Temper. Used: -25° to +65°C

Ambient Humidity Used: <85%RH

Operating Force: see Tabel

DM1 - 00P 4/7426**DM1 - 01P 4/7427****DM1 - 02P
DM3 - 02P****DM1 - 03P
DM3 - 03P****MODEL NO.****OPERATING FORCE (gf)**

DM1 - 00P - / DM3 - 00P -	90	110	140
DM1 - 01P - / DM3 - 01P -	25	30	40
DM1 - 02P - / DM3 - 02P -	25	30	40
DM1 - 03P - / DM3 - 03P -	20	25	35