

SM - Micro Switches



Rating: DM3 3A 125VAC
DM5 5A 125VAC

Insulation Resistance: >100M Ω DC500V

Withstand Voltage: AC 1,000 V 1minute

Contacts Resistance: <50m Ω

Soldering Temperature: 255°C max. 5 sec

Mechanical Life: 1,000,000 cycles





Electrical Life: 200,000 cycles

Ambient Temper. Used: -25° to +80°C


Ambient Humidity Used: <85%RH

Operating Force: SM3-00 130 gr
SM3-03 70 gr





4/7429 SM3-00P
4/7430 SM3-00N

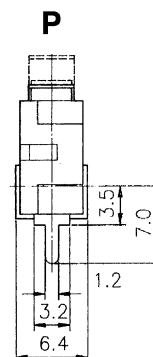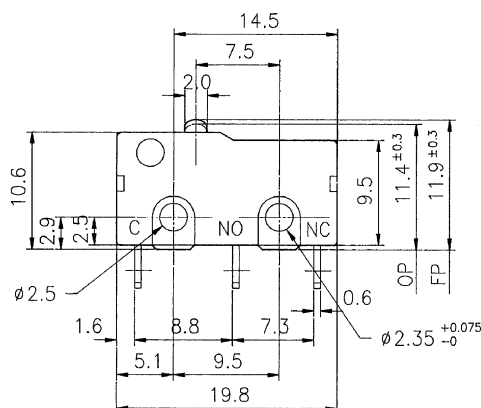

SCHEMATIC



4/7431 SM3-03P
4/7432 SM3-03N

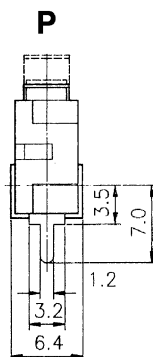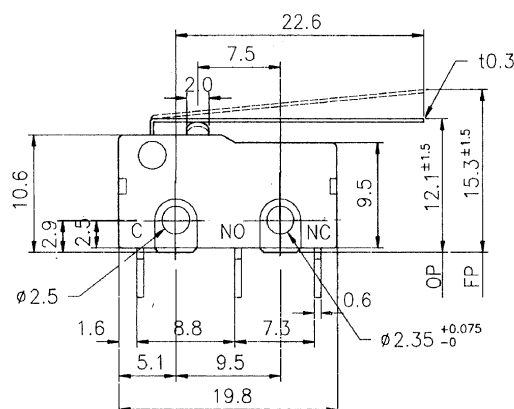

SCHEMATIC

