




ELCART DISTRIBUTION SPA
 VIA BUONARROTI 46
 20093 COLOGNO MONZESE (MI)

mail industria@elcart.it
 tel. 02/25.11.73.10

visita il nostro sito: www.elcart.com



TERMINAL BLOCK SERIES
CONNECTOR SERIES
COMPUTER CABLE SERIES

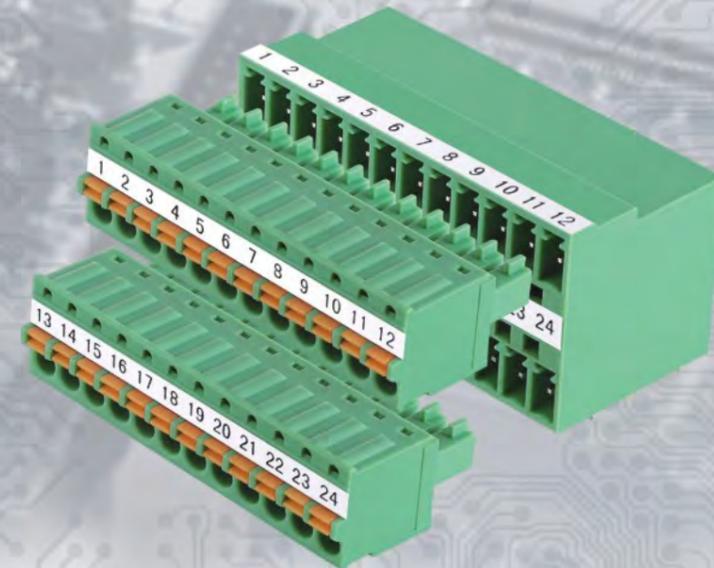

XINLAIYA
 Catalogue

宁波新莱亚电子科技有限公司

NINGBO XINLAIYA ELECTRONIC TECHNOLOGY CO.,LTD.

ISO9001 ISO14001 CB RoHS REACH



COMPANY INTRODUCTION

公司简介



Founded in 1992, NINGBO XINLAIYA ELECTRONIC TECH.CO.,LTD. specializes in production of terminal blocks, connectors, networking cables, electronic cables and computer cables, etc. Covering an area of 30000m² and construction area of 18000m², the company are manufacturing more than 300 series, 1000 specifications of products under the efforts of over 600 employees and 50 professionals.

Through the aggressive research and development, we have grown into a leading manufacturer of these fields in Asia. We have established a series of strong departments like R&D center, injection molding, stamping, die-casting, hardware cutting and assembly lines, etc. which are equipped with introduction of high-tech and advanced managing system. Under the precise work and constant innovation, XINLAIYA has been granted by ISO9001: 2015, UL, VDE, CE, CQC and ROHS, etc.

Adhering to the principles of sincerity, delication, innovation and cooperation, all staff of XINLAIYA would strive to keep the pace of market and make "XINLAIYA" more and more famous all over the world.





LEADING EQUIPMENT



XINLAIYA invested heavily, continue to introduce a variety of high-precision processing and production equipment, good production environment, all kinds of engineers, formed the independent production of all in one service from the independent design, independent processing.

The professional production process system and the demanding raw material purchasing system provide strong guarantee for product quality and enterprise development.





全国服务热线
0574-63506005

10%	China
15%	Asia Pacific
5%	North America
10%	south america
50%	Europe
5%	Africa
5%	Middle East

MARKETING AND SERVICE

XINLAIYA has a professional, efficient and vibrant domestic and international marketing team, integration of resources and fully understand customer needs, make rapid and accurate response to market network service system, so that customers no matter when and where you can enjoy our quality service.



Our enthusiastic technical service team will be happy to answer any technical or application questions for you.

CORPORATE CULTURE

企业文化

企业目标：创新经营，优质服务，回馈社会。
Business goals: innovation management, quality service, contribute to the community.

质量方针：质量为本，客户满意。
Quality: quality-oriented, customer satisfaction.


经营方针：不断创新，追求卓越，行业领先。
Business principles: continuous innovation, the pursuit of excellence, the industry leader.

Certificate

ISO9001 ISO14001 .UL CE CB RoHS REACH

EMAIL: xinya@public.cx.nbptt.zj.cn xy@china-xinya.com
 Http://www.china-xinya.com



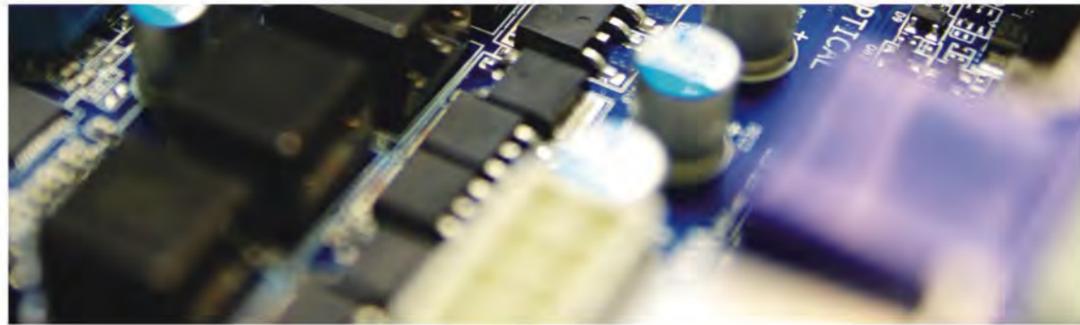

PRODUCT CATALOG

PCB Screw Terminal Blocks	11
Plug-in Terminal Blocks	25
PCB Spring Terminal Blocks	50
MCS Terminal Blocks	59
Transformer Terminal Block	67
Feed Through Terminal Blocks	70
Barrier Terminal Blocks	75





PCB Screw Terminal Blocks

PCB螺钉式接线端子

ISO9001 ISO14001 CB RoHS REACH

ISO9001 ISO14001 CB RoHS REACH



产品照片
Product Photo



XY126V-5.0






XY126V-7.5




XY126R-5.0

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	18A
导线截面	Wire range	26-14AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY126R-7.5






XY166-5.0



XY167V-5.0

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	10A	18A
导线截面	Wire range	26-14AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	

1 PCB螺钉式
2 接线端子
3 接线端子
4 接线端子
5 接线端子
6 接线端子
7 接线端子
8 接线端子
9 接线端子
10 接线端子
11 接线端子
12 接线端子
13 接线端子
14 接线端子
15 接线端子
16 接线端子
17 接线端子
18 接线端子
19 接线端子
20 接线端子
21 接线端子
22 接线端子
23 接线端子
24 接线端子
25 接线端子
26 接线端子
27 接线端子
28 接线端子
29 接线端子
30 接线端子
31 接线端子
32 接线端子
33 接线端子
34 接线端子
35 接线端子
36 接线端子
37 接线端子
38 接线端子
39 接线端子
40 接线端子
41 接线端子
42 接线端子
43 接线端子
44 接线端子
45 接线端子
46 接线端子
47 接线端子
48 接线端子
49 接线端子
50 接线端子
51 接线端子
52 接线端子
53 接线端子
54 接线端子
55 接线端子
56 接线端子
57 接线端子
58 接线端子
59 接线端子
60 接线端子
61 接线端子
62 接线端子
63 接线端子
64 接线端子
65 接线端子
66 接线端子
67 接线端子
68 接线端子
69 接线端子
70 接线端子
71 接线端子
72 接线端子
73 接线端子
74 接线端子
75 接线端子
76 接线端子
77 接线端子
78 接线端子
79 接线端子
80 接线端子
81 接线端子
82 接线端子
83 接线端子
84 接线端子
85 接线端子
86 接线端子
87 接线端子
88 接线端子
89 接线端子
90 接线端子
91 接线端子
92 接线端子
93 接线端子
94 接线端子
95 接线端子
96 接线端子
97 接线端子
98 接线端子
99 接线端子
100 接线端子

产品照片
Product Photo




XY167R-5.0



产品照片
Product Photo




XY300VA-5.0



产品照片
Product Photo




XY300VB-7.5




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	22A
导线截面	Wire range	22-14AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	


产品照片
Product Photo




XY301RA-5.0 XY301RB-5.08



XY301S-5.0



XY305A-5.0




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	17.5A
导线截面	Wire range	22-14AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PBT (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo




XY300RA-5.0




产品照片
Product Photo




XY300RB-7.5



产品照片
Product Photo



XY301VA-5.0 XY301VB-5.08




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	24A
导线截面	Wire range	22-14AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PBT (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	-	


产品照片
Product Photo




XY305B-7.5



XY306A-5.0 XY306B-5.08



XY307A-5.0



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	20A
导线截面	Wire range	22-14AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PBT (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY307B-7.5






XY340V-3.81



XY340R-3.81

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	12A	16A
导线截面	Wire range	22-14AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PBT (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY705R-7.5






XY332-5.0




XY332W-5.0

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	20A
导线截面	Wire range	22-14AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PBT (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY350V-3.5 XY350V-3.96






XY350R-3.5 XY350R-3.96



XY705V-7.5

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	3.5mm(.138")/3.96mm(.156")	
额定电压	Voltage Rating	300V	130V
额定电流	Current Rating	7A	10A
导线截面	Wire range	24-18AWG	1.0mm ²
耐压	Withstanding Voltage	AC1250V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY330VA-5.0






XY330RA-5.0



XY334-5.0

产品图纸
Product Plan




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	12A
导线截面	Wire range	-	-
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY330VB-5.0






XY330RB-5.0



XY333-3.5

产品图纸
Product Plan




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	12A
导线截面	Wire range	-	
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY103H-5.0






XY104-5.0



XY127V-5.0

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	24A
导线截面	Wire range	24-14AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	0.4N.m(13.5Lb-In.)
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY331V-3.5






XY331R-3.5



XY103-5.0

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.5mm(.138")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	8A
导线截面	Wire range	-	
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-30°C~+120°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY127R-5.0






XY127S-5.0 XY127S-5.08



XY128VA-5.0 XY128VA-5.08

产品图纸
Product Plan




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	12A	15A
导线截面	Wire range	26-14AWG	1.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	0.5N.m(4.4Lb-In.)
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY128RA-5.0 XY128RA-5.08


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	




XY128VB-7.5



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	




XY128RB-7.5




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY129VB-5.0 XY129VB-5.08


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	




XY129VB-7.5 XY129VB-7.62



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	



XY129RA-5.0




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY128VC-5.0


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	




XY128RC-5.0



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	



XY129VA-5.0 XY129VA-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY129RB-5.0 XY129RB-5.08


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	




XY129RB-7.5 XY129RB-7.62



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	20A	20A
导线截面	Wire range	26-12AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	



XY130-9.5




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	9.5mm(.375")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	30A	26A
导线截面	Wire range	26-10AWG	4.0mm ²
耐压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Steel, A3, Nickel Plated	


产品照片
Product Photo




XY135-10.16



XY136-10.16



XY136-12.76




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	10.16mm(.400")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	52A	57A
导线截面	Wire range	20-6AWG	10.0mm ²
耐电压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-30℃~+120℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M4.5, steel, A3, Zn plated	
方盒	Cage	Zinc alloy, Nickel Plated	


产品照片
Product Photo




CM 20/40-2P CM 20/42-3P



CM 73/07



CT 11-94




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P	
产品间距	Pitch	6.0mm(.236")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	15A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-30℃~+120℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	


产品照片
Product Photo




XY136-14.5



XY137-15.0



CM 20/41-2P CM 20/43-3P




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	14.5mm(.571")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	52A	57A
导线截面	Wire range	20-6AWG	10.0mm ²
耐电压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-30℃~+120℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M4.5, steel, A3, Zn plated	
方盒	Cage	Zinc alloy, Nickel Plated	


产品照片
Product Photo




XY302V-3.5



XY302R-3.5



XY303V-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	3.5mm(.138")	
额定电压	Voltage Rating	150V	130V
额定电流	Current Rating	10A	10A
导线截面	Wire range	26-16AWG	1.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	5mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY303R-3.81






XY304V-5.0 XY304V-5.08



XY304R-5.0 XY304R-5.08

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	130V
额定电流	Current Rating	10A	10A
导线截面	Wire range	26-16AWG	1.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY636-9.52






XYEK500-5.0 XYEK500-5.08



XYEEK500-5.0 XYEEK500-5.08

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	9.52mm(.375")	
额定电压	Voltage Rating	300V	1000V
额定电流	Current Rating	30A	32A
导线截面	Wire range	26-10AWG	4.0mm ²
耐电压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M3, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XY308-2.54






XY636-6.35



XY636-7.62

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P,3P-24P	
产品间距	Pitch	2.54mm(.100")	
额定电压	Voltage Rating	150V	130V
额定电流	Current Rating	6A	8A
导线截面	Wire range	26-18AWG	1.0mm ²
耐电压	Withstanding Voltage	AC1250V/Min	
额定扭矩	Rated torque	0.1N.m(0.9Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	4.5mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M1.6, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo



XYEK&EEK500A-5.0 XYEK&EEK508A-5.08






XYEK&EEK500B-5.0 XYEK&EEK508B-5.08




XYEK381&EEK381-3.81

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2*(2P,3P-24P)	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	18A
导线截面	Wire range	24-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Brass, Tin Plated	
螺丝	Screws	M2.5, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

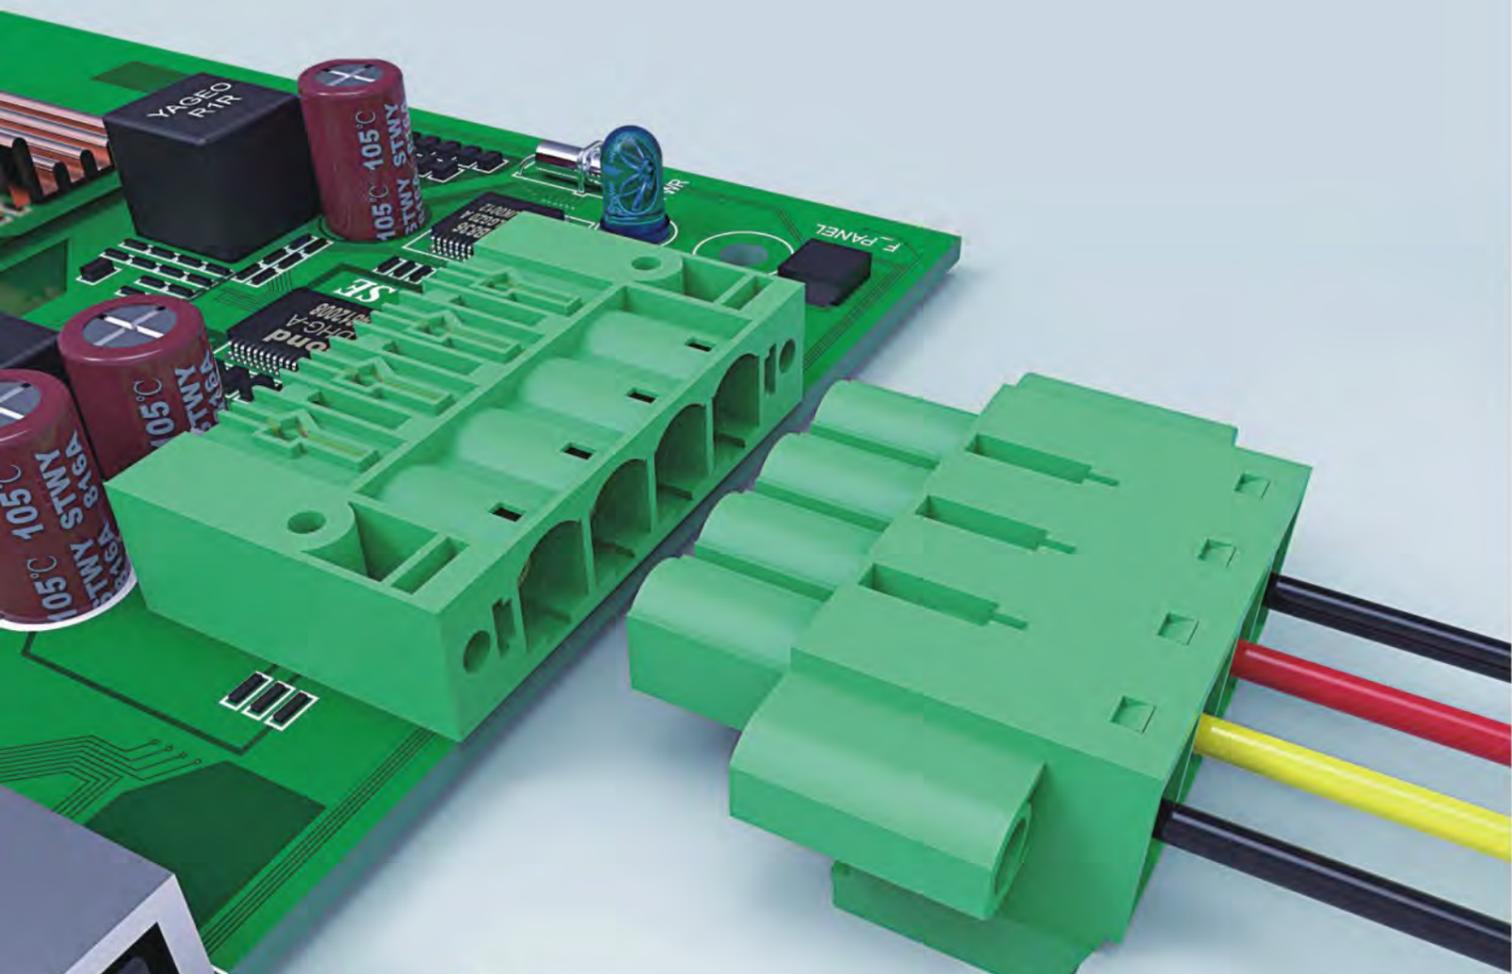

Plug-in Terminal Blocks

插拔式接线端子

ISO9001 ISO14001 CB RoHS REACH

ISO9001 ISO14001 CB RoHS REACH



产品照片 Product Photo	XY2500FG-3.5 XY2500FC-3.81		XY2500FGS-3.5 XY2500FCS-3.81		2500FF-3.5 XY2500FE-3.81	
	产品图纸 Product Plah					
认证 Certification						
标准 Standard	UL	IEC	UL	IEC	UL	IEC
极数 Poles	2P-24P		2P-20P		2P-24P	
产品间距 Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")	
额定电压 Voltage Rating	300V	250V	300V	250V	300V	250V
额定电流 Current Rating	8A	7A	8A	7A	8A	7A
导线截面 Wire range	28-16AWG	0.5-1.5mm ²	28-16AWG	0.5-1.5mm ²	28-16AWG	0.5-1.5mm ²
耐电压 Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩 Rated torque	0.2N.m(1.7Lb-In.)		0.2N.m(1.7Lb-In.)		0.2N.m(1.7Lb-In.)	
环境温度 Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度 Strip length	6-7mm		6-7mm		6-7mm	
塑件 Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片 Spring	-		-		-	
触点材料 Contact	Phosphor Bronze,Nickel Plated		Phosphor Bronze,Nickel Plated		Phosphor Bronze,Nickel Plated	
螺丝 Screws	M2,steel,A3,Zn plated		M2,steel,A3,Zn plated		M2,steel,A3,Zn plated	
方盒 Cage	Brass,Nickel Plated		Brass,Nickel Plated		Brass,Nickel Plated	

产品照片 Product Photo	XY2500FFR-3.5 XY2500FER-3.81		XY2500FFS-3.5 XY2500FES-3.81		XY2500FFRS-3.5 XY2500FERS-3.81	
	产品图纸 Product Plah					
认证 Certification						
标准 Standard	UL	IEC	UL	IEC	UL	IEC
极数 Poles	2P-24P		2P-20P		2P-20P	
产品间距 Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")	
额定电压 Voltage Rating	300V	250V	300V	250V	300V	250V
额定电流 Current Rating	8A	7A	8A	7A	8A	7A
导线截面 Wire range	28-16AWG	0.5-1.5mm ²	28-16AWG	0.5-1.5mm ²	28-16AWG	0.5-1.5mm ²
耐电压 Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩 Rated torque	0.2N.m(1.7Lb-In.)		0.2N.m(1.7Lb-In.)		0.2N.m(1.7Lb-In.)	
环境温度 Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度 Strip length	6-7mm		6-7mm		6-7mm	
塑件 Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片 Spring	-		-		-	
触点材料 Contact	Phosphor Bronze,Nickel Plated		Phosphor Bronze,Nickel Plated		Phosphor Bronze,Nickel Plated	
螺丝 Screws	M2,steel,A3,Zn plated		M2,steel,A3,Zn plated		M2,steel,A3,Zn plated	
方盒 Cage	Brass,Nickel Plated		Brass,Nickel Plated		Brass,Nickel Plated	

1 插拔式接线端子
2 插拔式接线端子
3 插拔式接线端子
4 插拔式接线端子
5 插拔式接线端子
6 插拔式接线端子
7 插拔式接线端子
8 插拔式接线端子
9 插拔式接线端子
10 插拔式接线端子
11 插拔式接线端子
12 插拔式接线端子
13 插拔式接线端子
14 插拔式接线端子
15 插拔式接线端子
16 插拔式接线端子
17 插拔式接线端子
18 插拔式接线端子
19 插拔式接线端子
20 插拔式接线端子
21 插拔式接线端子
22 插拔式接线端子
23 插拔式接线端子
24 插拔式接线端子
25 插拔式接线端子
26 插拔式接线端子
27 插拔式接线端子
28 插拔式接线端子
29 插拔式接线端子
30 插拔式接线端子
31 插拔式接线端子
32 插拔式接线端子
33 插拔式接线端子
34 插拔式接线端子
35 插拔式接线端子
36 插拔式接线端子
37 插拔式接线端子
38 插拔式接线端子
39 插拔式接线端子
40 插拔式接线端子
41 插拔式接线端子
42 插拔式接线端子
43 插拔式接线端子
44 插拔式接线端子
45 插拔式接线端子
46 插拔式接线端子
47 插拔式接线端子
48 插拔式接线端子
49 插拔式接线端子
50 插拔式接线端子
51 插拔式接线端子
52 插拔式接线端子
53 插拔式接线端子
54 插拔式接线端子
55 插拔式接线端子
56 插拔式接线端子
57 插拔式接线端子
58 插拔式接线端子
59 插拔式接线端子
60 插拔式接线端子
61 插拔式接线端子
62 插拔式接线端子
63 插拔式接线端子
64 插拔式接线端子
65 插拔式接线端子
66 插拔式接线端子
67 插拔式接线端子
68 插拔式接线端子
69 插拔式接线端子
70 插拔式接线端子
71 插拔式接线端子
72 插拔式接线端子
73 插拔式接线端子
74 插拔式接线端子
75 插拔式接线端子
76 插拔式接线端子
77 插拔式接线端子
78 插拔式接线端子
79 插拔式接线端子
80 插拔式接线端子
81 插拔式接线端子
82 插拔式接线端子
83 插拔式接线端子
84 插拔式接线端子
85 插拔式接线端子
86 插拔式接线端子
87 插拔式接线端子
88 插拔式接线端子
89 插拔式接线端子
90 插拔式接线端子
91 插拔式接线端子
92 插拔式接线端子
93 插拔式接线端子
94 插拔式接线端子
95 插拔式接线端子
96 插拔式接线端子
97 插拔式接线端子
98 插拔式接线端子
99 插拔式接线端子
100 插拔式接线端子


接线端子
插拔式

产品照片
Product Photo




XY2500FR-3.81

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

XY2500FRP-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

XY2500FRM-3.81




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	22-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Brass, Nickel Plated	

产品照片
Product Photo




XY2500FTS-3.5 XY2500FDS-3.81

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless steel	
触点材料	Contact	Phosphor Bronze, Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	

XY2500KN-3.5 XY2500KN-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	160V
额定电流	Current Rating	8A	8A
导线截面	Wire range	28-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC1600V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless steel	
触点材料	Contact	Copper alloy, Sn Plated	
螺丝	Screws	-	
方盒	Cage	-	

XY2500KNG-3.5 XY2500KNG-3.81




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	160V
额定电流	Current Rating	8A	8A
导线截面	Wire range	28-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC1600V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless steel	
触点材料	Contact	"Copper alloy, Sn plated"	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo




XY2500FJ-3.81

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze, Nickel Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Steel, Zinc Plated	

XY2500FJS-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.2N.m(1.7Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze, Nickel Plated	
螺丝	Screws	M2, steel, A3, Zn plated	
方盒	Cage	Steel, Zinc Plated	

XY2500FT-3.5 XY2500FD-3.81




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	28-16AWG	0.5-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Phosphor Bronze, Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo




XY2500NM-3.5 XY2500NM-3.81

产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	160V
额定电流	Current Rating	8A	8A
导线截面	Wire range	28-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Copper alloy, Sn Plated	
螺丝	Screws	-	
方盒	Cage	-	

XY2500VF-3.5 XY2500VE-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	-
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

XY2500VFS-3.5 XY2500VES-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	-
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

1 插接式端子
2 插接式端子
3 插接式端子
4 插接式端子
5 插接式端子
6 插接式端子
7 插接式端子
8 插接式端子
9 插接式端子
10 插接式端子
11 插接式端子
12 插接式端子

1 插接式端子
2 插接式端子
3 插接式端子
4 插接式端子
5 插接式端子
6 插接式端子
7 插接式端子
8 插接式端子
9 插接式端子
10 插接式端子
11 插接式端子
12 插接式端子

产品照片 Product Photo		XY2500RG-3.5 XY2500RF-3.81		XY2500RGS-3.5 XY2500RFS-3.81		XY2500LF-3.5 XY2500LE-3.81	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-24P		2P-20P		2P-24P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V	300V	250V	300V	250V
额定电流	Current Rating	8A	7A	8A	7A	8A	7A
导线截面	Wire range	-		-		-	
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	-		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	-		-		-	
方盒	Cage	-		-		-	

产品照片 Product Photo		XY2500TRF-3.5 XY2500TRE-3.81		XY2500TRFS-3.5 XY2500TRES-3.81		XY2500VR-3.81	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2*(2P-24P)		2*(2P-20P)		2*(2P-20P)	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.81mm(.150")	
额定电压	Voltage Rating	300V	250V	300V	250V	300V	125V
额定电流	Current Rating	8A	7A	8A	7A	8A	8A
导线截面	Wire range	-		-		-	
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	-		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	-		-		-	
方盒	Cage	-		-		-	

产品照片 Product Photo		XY2500LFS-3.5 XY2500LES-3.81		XY2500TVF-3.5 XY2500TVE-3.81		XY2500TVFS-3.5 XY2500TVES-3.81	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-20P		2*(2P-24P)		2*(2P-20P)	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V	300V	250V	300V	250V
额定电流	Current Rating	8A	7A	8A	7A	8A	7A
导线截面	Wire range	-		-		-	
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	-		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	-		-		-	
方盒	Cage	-		-		-	

产品照片 Product Photo		XY2500HVF-3.5 XY2500HVE-3.81		XY2500HVFS-3.5 XY2500HVES-3.81		XY2500HRF-3.5 XY2500HRE-3.81	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2*(2P-24P)		2*(2P-20P)		2*(2P-24P)	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")		3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V	300V	250V	300V	250V
额定电流	Current Rating	8A	7A	8A	7A	8A	7A
导线截面	Wire range	-		-		-	
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	-		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	-		-		-	
方盒	Cage	-		-		-	

插拔式
接线端子

产品照片
Product Photo



XY2500HRFS-3.5 XY2500HRES-3.81






XY2500KVG-3.5 XY2500KVG-3.81



XY2500KVH-3.5 XY2500KVH-3.81

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2*(2P-20P)	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500A-3.5 XY2500A-3.81






XY2500AS-3.5 XY2500AS-3.81



XY2500B-3.5 XY2500B-3.81

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500KRH-3.5 XY2500KRH-3.81






XY2500KRG-3.5 XY2500KRG-3.81



XY2500FVTS-3.81

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2*(2P-24P)	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	


产品照片
Product Photo



XY2500BS-3.5 XY2500BS-3.81






XYDB15-3.5F



XYDB15-3.5R

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	3.5mm(.138")/3.81mm(.150")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	7A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

① 插接式端子
② 插接式端子
③ 插接式端子
④ 插接式端子
⑤ 插接式端子
⑥ 插接式端子
⑦ 插接式端子
⑧ 插接式端子
⑨ 插接式端子
⑩ 插接式端子
⑪ 插接式端子
⑫ 插接式端子

① 插接式端子
② 插接式端子
③ 插接式端子
④ 插接式端子
⑤ 插接式端子
⑥ 插接式端子
⑦ 插接式端子
⑧ 插接式端子
⑨ 插接式端子
⑩ 插接式端子
⑪ 插接式端子
⑫ 插接式端子

产品照片
Product Photo



XY2500FA-5.0 XY2500FB-5.0B






XY2500FM-7.5 XY2500FN-7.62



XY2500FAS-5.0 XY2500FBS-5.0B

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass(Nickel Plated)or Steel(Zinc Plated)	

产品照片
Product Photo



XY2500FU-5.0 XY2500FU-5.0B






XY2500FUS-5.0 XY2500FUS-5.0B



XY2500FH-5.0 XY2500FI-5.0B

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	24-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass(Nickel Plated)or Steel(Zinc Plated)	

产品照片
Product Photo



XY2500FMS-7.5 XY2500FNS-7.62






XY2500FAT-5.0 XY2500FBT-5.0B



XY2500FATS-5.0 XY2500FBTS-5.0B

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass(Nickel Plated)or Steel(Zinc Plated)	

产品照片
Product Photo



XY2500FHS-5.0 XY2500FIS-5.0B






XY2500FAV-5.0 XY2500FBV-5.0B



XY2500FP-7.5 XY2500FQ-7.62

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-20P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Steel,Zinc Plated	


接线端子
插拔式

产品照片
Product Photo



XY2500FAVR-5.0 XY2500FBVR-5.08


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	




XY2500FPR-7.5 XY2500FQR-7.62



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	



XY2500FAVS-5.0 XY2500FBVS-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	

产品照片
Product Photo



XY2500SKT-7.62


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	30A	32A
导线截面	Wire range	30-10AWG	0.2-4mm ²
耐电压	Withstanding Voltage	AC4000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	




XY2500SKM-7.62



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	30A	32A
导线截面	Wire range	30-10AWG	0.2-4mm ²
耐电压	Withstanding Voltage	AC4000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	



XY2500SKT-10.16




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-8P	
产品间距	Pitch	10.16mm(.400")	
额定电压	Voltage Rating	600V	600V
额定电流	Current Rating	52A	57A
导线截面	Wire range	20-6AWG	0.5-10mm ²
耐电压	Withstanding Voltage	AC6000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	

产品照片
Product Photo



XY2500FPS-7.5 XY2500FQS-7.62


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	




XY2500FAVRS-5.0 XY2500FBVRS-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	



XY2500FPRS-7.5 XY2500FQRS-7.62




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M3,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	

产品照片
Product Photo



XY2500SKM-10.16


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-8P	
产品间距	Pitch	10.16mm(.400")	
额定电压	Voltage Rating	600V	600V
额定电流	Current Rating	52A	57A
导线截面	Wire range	20-6AWG	0.5-10mm ²
耐电压	Withstanding Voltage	AC6000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	M4,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	




XY2500FS-5.0 XY2500FS-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	15A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	



XY2500FSS-5.0 XY2500FSS-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	15A
导线截面	Wire range	28-12AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	


接线端子
插拔式

产品照片
Product Photo



XY2500FR-5.08


产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	




XY2500FRM-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	



XY2500FRP-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	6-7mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass,Nickel Plated	
螺丝	Screws	M2.5,steel,A3 Zn plated	
方盒	Cage	Brass,Nickel Plated	

产品照片
Product Photo



XY2500FKWS-5.0 XY2500FLWS-5.08


产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	26-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	




XY2500KDHG-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	28-14AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Copper alloy, Ni plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500KAHM-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	28-14AWG	2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Ni plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	

产品照片
Product Photo



XY2500FK-5.0 XY2500FL-5.08


产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	26-12AWG	0.2-2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	




XY2500FKS-5.0 XY2500FLS-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	26-12AWG	0.2-2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500FKW-5.0 XY2500FLW-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-16P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	20A
导线截面	Wire range	26-12AWG	2.5mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	Phosphor Bronze,Nickel Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500DB-5.08


产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-14AWG	0.2-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy,Sn plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy,Ni plated	




XY2500DBM-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-14AWG	0.2-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy,Sn plated	
螺丝	Screws	M3,Steel,Zn plated	
方盒	Cage	Copper alloy,Ni plated	



XY2500STD-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	20A
导线截面	Wire range	28-14AWG	1.0-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.4N.m(3.5Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	M2.5,Steel,Zn plated	
方盒	Cage	Copper alloy, Ni plated	

1 接线端子
2 插拔式
3 插拔式
4 插拔式
5 插拔式
6 插拔式
7 插拔式
8 插拔式
9 插拔式
10 插拔式
11 插拔式
12 插拔式
13 插拔式
14 插拔式
15 插拔式
16 插拔式
17 插拔式
18 插拔式
19 插拔式
20 插拔式
21 插拔式
22 插拔式
23 插拔式
24 插拔式
25 插拔式
26 插拔式
27 插拔式
28 插拔式
29 插拔式
30 插拔式
31 插拔式
32 插拔式
33 插拔式
34 插拔式
35 插拔式
36 插拔式
37 插拔式
38 插拔式
39 插拔式
40 插拔式
41 插拔式
42 插拔式
43 插拔式
44 插拔式
45 插拔式
46 插拔式
47 插拔式
48 插拔式
49 插拔式
50 插拔式
51 插拔式
52 插拔式
53 插拔式
54 插拔式
55 插拔式
56 插拔式
57 插拔式
58 插拔式
59 插拔式
60 插拔式
61 插拔式
62 插拔式
63 插拔式
64 插拔式
65 插拔式
66 插拔式
67 插拔式
68 插拔式
69 插拔式
70 插拔式
71 插拔式
72 插拔式
73 插拔式
74 插拔式
75 插拔式
76 插拔式
77 插拔式
78 插拔式
79 插拔式
80 插拔式
81 插拔式
82 插拔式
83 插拔式
84 插拔式
85 插拔式
86 插拔式
87 插拔式
88 插拔式
89 插拔式
90 插拔式
91 插拔式
92 插拔式
93 插拔式
94 插拔式
95 插拔式
96 插拔式
97 插拔式
98 插拔式
99 插拔式
100 插拔式

1 接线端子
2 插拔式
3 插拔式
4 插拔式
5 插拔式
6 插拔式
7 插拔式
8 插拔式
9 插拔式
10 插拔式
11 插拔式
12 插拔式
13 插拔式
14 插拔式
15 插拔式
16 插拔式
17 插拔式
18 插拔式
19 插拔式
20 插拔式
21 插拔式
22 插拔式
23 插拔式
24 插拔式
25 插拔式
26 插拔式
27 插拔式
28 插拔式
29 插拔式
30 插拔式
31 插拔式
32 插拔式
33 插拔式
34 插拔式
35 插拔式
36 插拔式
37 插拔式
38 插拔式
39 插拔式
40 插拔式
41 插拔式
42 插拔式
43 插拔式
44 插拔式
45 插拔式
46 插拔式
47 插拔式
48 插拔式
49 插拔式
50 插拔式
51 插拔式
52 插拔式
53 插拔式
54 插拔式
55 插拔式
56 插拔式
57 插拔式
58 插拔式
59 插拔式
60 插拔式
61 插拔式
62 插拔式
63 插拔式
64 插拔式
65 插拔式
66 插拔式
67 插拔式
68 插拔式
69 插拔式
70 插拔式
71 插拔式
72 插拔式
73 插拔式
74 插拔式
75 插拔式
76 插拔式
77 插拔式
78 插拔式
79 插拔式
80 插拔式
81 插拔式
82 插拔式
83 插拔式
84 插拔式
85 插拔式
86 插拔式
87 插拔式
88 插拔式
89 插拔式
90 插拔式
91 插拔式
92 插拔式
93 插拔式
94 插拔式
95 插拔式
96 插拔式
97 插拔式
98 插拔式
99 插拔式
100 插拔式

产品照片 Product Photo		XY2500UDB-5.08		XY2500STM-5.08		XY2500UDBM-5.08	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	6P-24P		6P-24P		6P-24P	
产品间距	Pitch	5.08mm(.200")		5.08mm(.200")		5.08mm(.200")	
额定电压	Voltage Rating	300V	450V	300V	450V	300V	450V
额定电流	Current Rating	15A	20A	10A	20A	15A	20A
导线截面	Wire range	28-14AWG	0.2-2.5mm ²	28-14AWG	2.5mm ²	28-14AWG	0.2-2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		0.4N.m(3.5Lb-In.)		0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	7-8mm		7-8mm		7-8mm	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Copper alloy, Sn plated		Copper alloy, Sn plated		Copper alloy, Sn plated	
螺丝	Screws	M3, Steel, Zn plated		M3, Steel, Zn plated		M3, Steel, Zn plated	
方盒	Cage	Copper alloy, Ni plated		Copper alloy, Ni plated		Copper alloy, Ni plated	

产品照片 Product Photo		XY2500URK-5.08		XY2500VA-5.0 XY2500VC-5.08		XY2500VB-5.0 XY2500VD-5.08	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	6P-24P		2P-24P		2P-22P	
产品间距	Pitch	5.08mm(.200")		5.0mm(.197")/5.08mm(.200")		5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	450V	300V	320V	300V	320V
额定电流	Current Rating	15A	20A	15A	20A	15A	20A
导线截面	Wire range	28-14AWG	2.5mm ²	-	-	-	-
耐电压	Withstanding Voltage	AC2000V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	7-8mm		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Copper alloy, Sn Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	M3, Steel, Zn plated		-		-	
方盒	Cage	Copper alloy, Ni plated		-		-	

产品照片 Product Photo		XY2500DKM-5.08		XY2500UDBN-5.08		XY2500VRK-5.08	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	6P-24P		6P-24P		6P-24P	
产品间距	Pitch	5.08mm(.200")		5.08mm(.200")		5.08mm(.200")	
额定电压	Voltage Rating	300V	450V	300V	450V	300V	450V
额定电流	Current Rating	15A	20A	15A	20A	15A	20A
导线截面	Wire range	28-14AWG	0.2-2.5mm ²	28-14AWG	2.5mm ²	28-14AWG	2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	7-8mm		7-8mm		7-8mm	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Copper alloy, Sn plated		Copper alloy, Sn plated		Copper alloy, Sn Plated	
螺丝	Screws	M3, Steel, Zn plated		M3, Steel, Zn plated		M3, Steel, Zn plated	
方盒	Cage	Copper alloy, Ni plated		Copper alloy, Ni plated		Copper alloy, Ni plated	

产品照片 Product Photo		XY2500VM-7.5 XY2500VN-7.62		XY2500VP-7.5 XY2500VQ-7.62		XY2500VBS-5.0 XY2500VDS-5.08	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-12P		2P-12P		2P-22P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")		7.5mm(.295")/7.62mm(.300")		5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	400V	300V	400V	300V	320V
额定电流	Current Rating	15A	20A	15A	20A	15A	20A
导线截面	Wire range	-		-		-	
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
额定扭矩	Rated torque	-		-		-	
环境温度	Ambient temperature	-40℃~+105℃		-40℃~+105℃		-40℃~+105℃	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	
螺丝	Screws	-		-		-	
方盒	Cage	-		-		-	

1 插拔式
2 插拔式
3 插拔式
4 插拔式
5 插拔式
6 插拔式
7 插拔式
8 插拔式
9 插拔式
10 插拔式
11 插拔式
12 插拔式


1 插拔式
2 插拔式
3 插拔式
4 插拔式
5 插拔式
6 插拔式
7 插拔式
8 插拔式
9 插拔式
10 插拔式
11 插拔式
12 插拔式

产品照片
Product Photo



XY2500VPS-7.5 XY2500VQS-7.62


产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500RA-5.0 XY2500RC-5.08



XY2500RB-5.0 XY2500RD-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo




XY2500RPS-7.5 XY2500RQS-7.62


产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500LA-5.0 XY2500LC-5.08



XY2500LB-5.0 XY2500LD-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500RM-7.5 XY2500RN-7.62



产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	7.5mm(.295")/7.62mm(.300")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500RP-7.5 XY2500RQ-7.62



XY2500RBS-5.0 XY2500RDS-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500LBS-5.0 XY2500LDS-5.08


产品图纸
Product Plah




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	



XY2500TVA-5.0 XY2500TVC-5.08



XY2500TRA-5.0 XY2500TRC-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2*(2P-24P)	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

1 插拔式端子
2 插拔式端子
3 插拔式端子
4 插拔式端子
5 插拔式端子
6 插拔式端子
7 插拔式端子
8 插拔式端子
9 插拔式端子
10 插拔式端子
11 插拔式端子

1 插拔式端子
2 插拔式端子
3 插拔式端子
4 插拔式端子
5 插拔式端子
6 插拔式端子
7 插拔式端子
8 插拔式端子
9 插拔式端子
10 插拔式端子
11 插拔式端子

产品照片
Product Photo



XY2500HVA-5.0 XY2500HVB-5.08






XY2500HVAS-5.0 XY2500HVBS-5.08



XY2500HRA-5.0 XY2500HRB-5.08

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2*(2P-24P)	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500B-5.0 XY2500B-5.08






XY2500BS-5.0 XY2500BS-5.08



XY2500NCRM-5.08

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Phosphor Bronze, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500HRAS-5.0 XY2500HRBS-5.08






XY2500A-5.0 XY2500A-5.08



XY2500AS-5.0 XY2500AS-5.08

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2*(2P-22P)	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	10A
导线截面	Wire range	-	
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	-	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	
方盒	Cage	-	

产品照片
Product Photo



XY2500NC-5.08






XY2500NCG-5.08



XY2500NCM-5.08

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-24P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	10A
导线截面	Wire range	20-14AWG 0.5-2.5mm ²	
耐电压	Withstanding Voltage	AC4000V/Min	
额定扭矩	Rated torque	-	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	7-8mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless steel	
触点材料	Contact	Phosphor Bronze, Ni Plated	
螺丝	Screws	-	
方盒	Cage	-	

1 插接式端子
2 插接式端子
3 插接式端子
4 插接式端子
5 插接式端子
6 插接式端子
7 插接式端子
8 插接式端子
9 插接式端子
10 插接式端子

1 插接式端子
2 插接式端子
3 插接式端子
4 插接式端子
5 插接式端子
6 插接式端子
7 插接式端子
8 插接式端子
9 插接式端子
10 插接式端子

产品照片 Product Photo				
产品图纸 Product Plah				
认证	Certification			
标准	Standard	UL IEC	UL IEC	UL IEC
极数	Poles	2P-24P	1P-xxP	1P-xxP
产品间距	Pitch	5.08mm(.200")	3.5mm(.138")	5.0mm(.197")
额定电压	Voltage Rating	300V 250V	300V 250V	300V 250V
额定电流	Current Rating	10A 10A	8A 7A	10A 15A
导线截面	Wire range	20-14AWG 0.5-2.5mm ²	-	-
耐电压	Withstanding Voltage	AC2500V/Min	AC2000V/Min	AC2000V/Min
额定扭矩	Rated torque	-	-	-
环境温度	Ambient temperature	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
剥线长度	Strip length	7-8mm	-	-
塑件	Housing	PA66 (UL 94V-0)	PA66 (UL 94V-0)	PA66 (UL 94V-0)
弹片	Spring	-	Phosphor Bronze	Phosphor Bronze
触点材料	Contact	Phosphor Bronze, Ni Plated	-	-
螺丝	Screws	-	-	-
方盒	Cage	-	-	-

产品照片 Product Photo				
产品图纸 Product Plah				
认证	Certification			
标准	Standard	UL IEC	UL IEC	UL IEC
极数	Poles	1P-xxP	2P-12P	2P-12P
产品间距	Pitch	7.5mm(.295")	7.62mm(.300")	7.62mm(.300")
额定电压	Voltage Rating	300V 400V	300V 400V	300V 400V
额定电流	Current Rating	10A 15A	30A 32A	30A 32A
导线截面	Wire range	24-12AWG 2.5mm ²	-	-
耐电压	Withstanding Voltage	AC2500V/Min	AC4000V/Min	AC4000V/Min
额定扭矩	Rated torque	-	-	-
环境温度	Ambient temperature	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
剥线长度	Strip length	-	-	-
塑件	Housing	PA66 (UL 94V-0)	PA66 (UL 94V-0)	PP66 (UL 94V-0)
弹片	Spring	Stainless steel	-	-
触点材料	Contact	Phosphor Bronze, Tin Plated	Copper alloy, Sn plated	Copper alloy, Sn plated
螺丝	Screws	-	-	-
方盒	Cage	-	-	-

产品照片 Product Photo				
产品图纸 Product Plah				
认证	Certification			
标准	Standard	UL IEC	UL IEC	UL IEC
极数	Poles	1P-xxP	1P-xxP	1P-xxP
产品间距	Pitch	7.5mm(.295")	3.5mm(.138")	5.0mm(.197")
额定电压	Voltage Rating	300V 400V	300V 250V	300V 300V
额定电流	Current Rating	10A 15A	8A 7A	10A 15A
导线截面	Wire range	-	28-16AWG 1.5mm ²	24-12AWG 2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	AC2000V/Min	AC2500V/Min
额定扭矩	Rated torque	-	-	-
环境温度	Ambient temperature	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
剥线长度	Strip length	-	-	-
塑件	Housing	PA66 (UL 94V-0)	PA66 (UL 94V-0)	PA66 (UL 94V-0)
弹片	Spring	Phosphor Bronze	Stainless steel	Stainless steel
触点材料	Contact	-	Phosphor Bronze, Tin Plated	Phosphor Bronze, Tin Plated
螺丝	Screws	-	-	-
方盒	Cage	-	-	-


产品照片 Product Photo				
产品图纸 Product Plah				
认证	Certification			
标准	Standard	UL IEC	UL IEC	UL IEC
极数	Poles	2P-12P	2P-12P	2P-8P
产品间距	Pitch	7.62mm(.300")	7.62mm(.300")	10.16mm(.400")
额定电压	Voltage Rating	300V 400V	300V 400V	300V 600V
额定电流	Current Rating	30A 32A	30A 32A	52A 57A
导线截面	Wire range	-	-	-
耐电压	Withstanding Voltage	AC4000V/Min	AC4000V/Min	AC6000V/Min
额定扭矩	Rated torque	-	-	-
环境温度	Ambient temperature	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
剥线长度	Strip length	-	-	-
塑件	Housing	PA66 (UL 94V-0)	PA66 (UL 94V-0)	PA66 (UL 94V-0)
弹片	Spring	-	-	-
触点材料	Contact	Copper alloy, Sn plated	Copper alloy, Sn plate	Copper alloy, Sn plate
螺丝	Screws	-	-	-
方盒	Cage	-	-	-

PLUG-IN TERMINAL BLOCKS

产品照片
Product Photo



XY2500SRC-10.16






XY2500SVM-10.16



XY2500SVC-10.16

产品图纸
Product Plan




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-8P	
产品间距	Pitch	10.16mm(.400")	
额定电压	Voltage Rating	300V	600V
额定电流	Current Rating	52A	57A
导线截面	Wire range	-	-
耐电压	Withstanding Voltage	AC6000V/Min	
额定扭矩	Rated torque	-	-
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	-
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	-
触点材料	Contact	Copper alloy, Sn plated	
螺丝	Screws	-	-
方盒	Cage	-	-

产品照片
Product Photo





XY2500WB-5.0 XY2500WB-5.08




XY2500WC-3.5 XY2500WC-3.81

产品图纸
Product Plan



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-22P	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	15A	20A
导线截面	Wire range	-	-
耐电压	Withstanding Voltage	AC4000V/Min	
额定扭矩	Rated torque	-	-
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	-
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	-
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	-	-
方盒	Cage	-	-

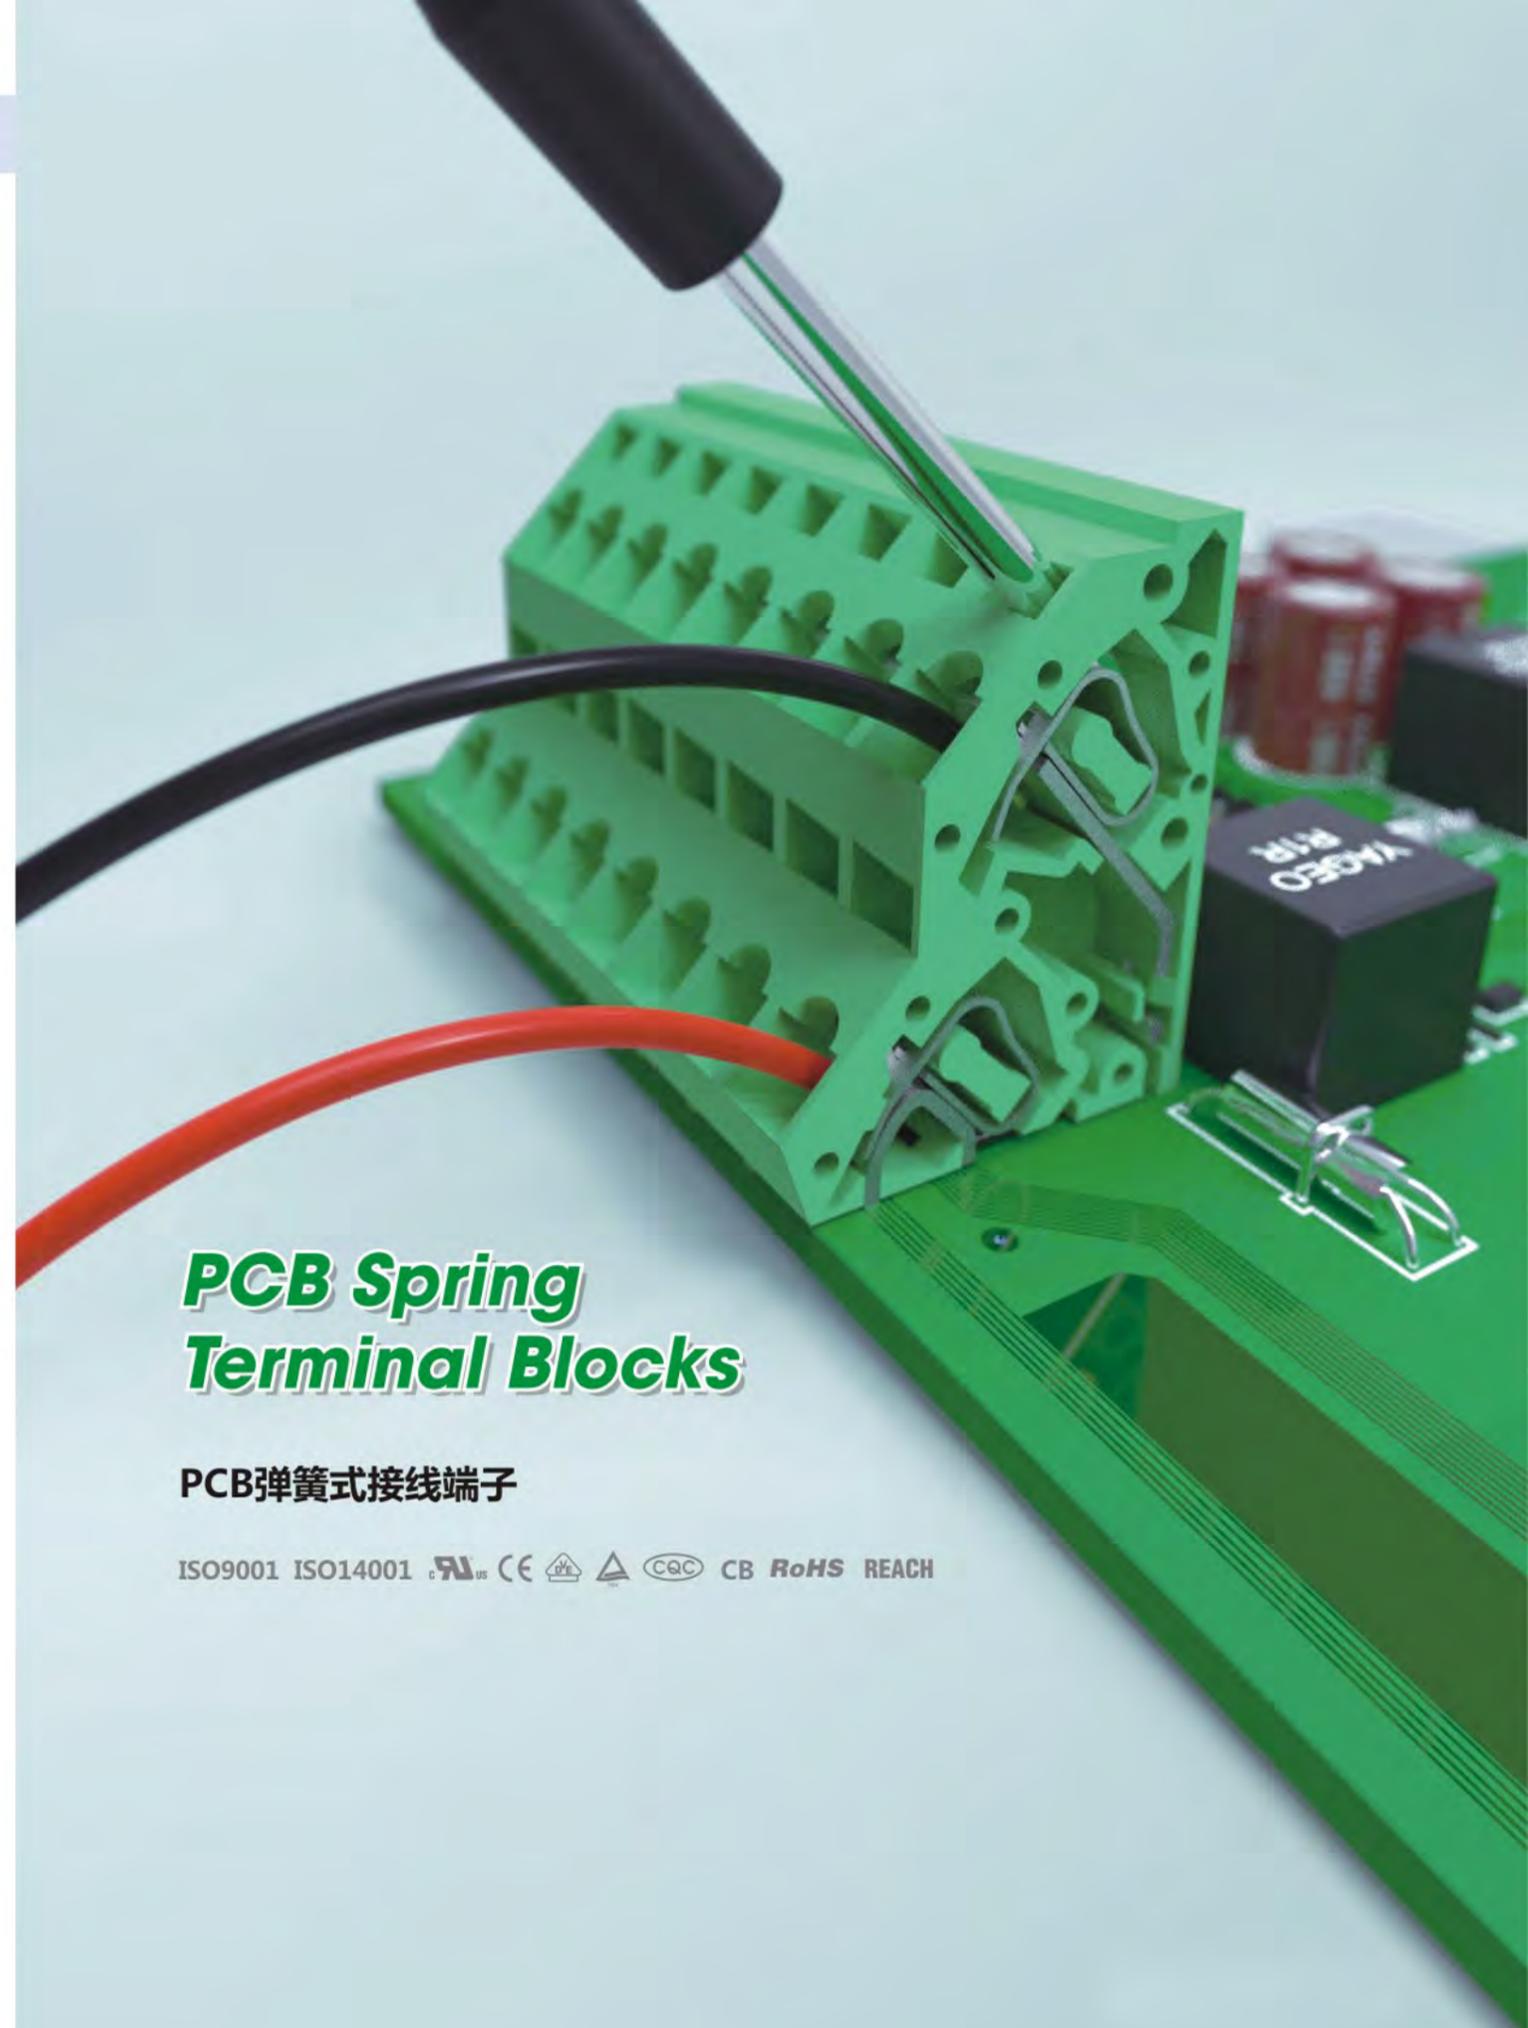

PCB Spring Terminal Blocks

PCB弹簧式接线端子

ISO9001 ISO14001 CB RoHS REACH


① PCB 螺钉式 接线端子
② 插拔式 接线端子
③ PCB 弹簧式 接线端子
④ M 连接器 用途
⑤ 变压器 接线端子
⑥ 贯通式 接线端子
⑦ 插针式 接线端子
⑧ U 导轨式 接线端子
⑨ 接插件
⑩ 电脑线 线材

产品照片
Product Photo



XY111A-5.0 XY111B-5.08


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	17A
导线截面	Wire range	28-12AWG	0.2-2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	




XY112A-5.0 XY112B-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2*(1P-XXP)	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	10A	18A
导线截面	Wire range	28-12AWG	0.2-2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	



XY115A-5.0 XY115B-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	15A	17A
导线截面	Wire range	28-12AWG	0.2-2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	5-6mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	

产品照片
Product Photo



XY119A-5.0 XY119B-5.08


产品图纸
Product Plan



标准	Standard		
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	5A	15A
导线截面	Wire range	20-18AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	




XY119AW-5.0 XY119BW-5.08



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	5A	15A
导线截面	Wire range	20-18AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	



XY120A-5.0 XY120B-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")/5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	5A	15A
导线截面	Wire range	20-18AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	

产品照片
Product Photo



XY117A-5.0


产品图纸
Product Plan



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-8P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	8A	10A
导线截面	Wire range	20-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Copper, Tin plated	
触点材料	Contact	-	




XY117B-3.81



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P-8P	
产品间距	Pitch	3.81mm(.150")	
额定电压	Voltage Rating	300V	200V
额定电流	Current Rating	8A	10A
导线截面	Wire range	20-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Copper, Tin plated	
触点材料	Contact	-	



XY118-5.0




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	2P, 3P	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	8A	10A
导线截面	Wire range	22-18AWG	1.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	

产品照片
Product Photo



XY121A-2.5


产品图纸
Product Plan




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	2.5mm(.098")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	2A	2A
导线截面	Wire range	24-20AWG	0.2-0.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Phosphor Bronze, Tin Plated	
触点材料	Contact	-	




XY121B-3.5



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	3.5mm(.138")	
额定电压	Voltage Rating	300V	400V
额定电流	Current Rating	7A	5A
导线截面	Wire range	22-18AWG	0.2-0.75mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-9mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
焊脚	Pin header	Phosphor Bronze, Tin Plated	
触点材料	Contact	-	




XY122R-5.08




认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	15A
导线截面	Wire range	22-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact	-	

产品照片
Product Photo




XY122V-5.08


产品图纸
Product Plan



XY123R-2.54



XY123V-2.54




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	15A
导线截面	Wire range	22-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact		

产品照片
Product Photo




XY124VD-5.08


产品图纸
Product Plan



XY125V-2.54



XY125R-2.54




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	5A	15A
导线截面	Wire range	20-18AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact		

产品照片
Product Photo




XY124VA-5.0


产品图纸
Product Plan



XY124VB-5.08



XY124VC-5.0




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	1P-XXP	
产品间距	Pitch	5.0mm(.197")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	5A	15A
导线截面	Wire range	20-18AWG	1.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact		

产品照片
Product Photo




XY237-5.08


产品图纸
Product Plan



XY602



XY603



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-7P	
产品间距	Pitch	5.08mm(.200")	
额定电压	Voltage Rating	300V	320V
额定电流	Current Rating	10A	10A
导线截面	Wire range	22-16AWG	0.2-1.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	9-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
焊脚	Pin header	Brass, Tin Plated	
触点材料	Contact		

产品照片 Product Photo		XY2500Z-2P		XY2500Z-3P		XY2504-1P	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P		3P		4P	
产品间距	Pitch	4.0mm(.157")		4.0mm(.157")		4.0mm(.157")	
额定电压	Voltage Rating	150V	250V	150V	250V	150V	250V
额定电流	Current Rating	7A	9A	7A	9A	3A	5A
导线截面	Wire range	-	-	-	-	24-18AWG	0.75mm ²
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2000V/Min	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	-		-		7-8mm	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PPA-GF (UL 94V-0)	
弹片	Spring	-		-		-	
焊脚	Pin header	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Brass, Tin Plated	

产品照片 Product Photo		XY701		XY702		XY703	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P,3P,4P,5P,8P		2P-24P		2P-24P	
产品间距	Pitch	3.5mm(.138")		10.5mm(.413")		10.5mm(.413")	
额定电压	Voltage Rating	600V	450V	300V	450V	300V	450V
额定电流	Current Rating	15A	24A	30A	41A	30A	41A
导线截面	Wire range	22-14AWG	0.5-2.5mm ²	18-10AWG	1.0-6.0mm ²	18-10AWG	1.0-6.0mm ²
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	10-13mm(.512")		7-8mm		7-8mm	
塑件	Housing	PA66(UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	Stainless steel		Stainless steel		Stainless steel	
焊脚	Pin header	-		-		-	
触点材料	Contact	Copper alloy, Sn plated		-		-	

产品照片 Product Photo		XY2504-2P		XY2504-3P		XY238-10.0	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	4P		4P		2P-5P	
产品间距	Pitch	4.0mm(.157")		4.0mm(.157")		10mm(.394")	
额定电压	Voltage Rating	150V	250V	150V	250V	600V	450V
额定电流	Current Rating	7A	5A	7A	5A	20A	24A
导线截面	Wire range	24-18AWG	0.75mm ²	24-18AWG	0.75mm ²	22-12AWG	0.75-2.5mm ²
耐电压	Withstanding Voltage	AC2500V/Min		AC2500V/Min		AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	7-8mm		7-8mm		9-10mm	
塑件	Housing	PPA-GF (UL 94V-0)		PPA-GF (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		Stainless	
焊脚	Pin header	-		-		-	
触点材料	Contact	Brass, Tin Plated		Brass, Tin Plated		Copper alloy, Sn plated	

产品照片 Product Photo		XY704		XY705		XY2500Z-1P	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P,3P,4P,5P,8P		2P-5P		1P	
产品间距	Pitch	3.5mm(.138")		4.6mm(.181")		4.0mm(.157")	
额定电压	Voltage Rating	600V	450V	600V	400V	150V	250V
额定电流	Current Rating	15A	24A	20A	32A	7A	9A
导线截面	Wire range	22-14AWG	0.5-2.5mm ²	28-12AWG	0.08-4mm ²	-	-
耐电压	Withstanding Voltage	AC2500V/Min		AC4000V/Min		AC2500V/Min	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	10-13mm(.512")		9-10mm		-	
塑件	Housing	PA66(UL 94V-0)		PA66(UL 94V-0)		PA66(UL 94V-0)	
弹片	Spring	Stainless steel		Stainless steel		-	
焊脚	Pin header	-		-		-	
触点材料	Contact	Copper alloy, Sn plated		Copper alloy, Sn plated		Brass, Tin Plated	

Transformer Terminal Block

变压器接线端子

ISO9001 ISO14001 CB RoHS REACH



ISO9001 ISO14001 CB RoHS REACH



产品照片
Product Photo



XY260






XY261



XY262

产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P/2P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	20A	32A
导线截面	Wire range	20-10AWG	0.5-4mm ²
耐压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	0.8N.m(7.0Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	10-12mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M3.5, steel, Cr3+ Zn plated	
方盒	Cage	Brass, Nickel Plated	

认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P	
产品间距	Pitch	15mm(.591")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	20A	41A
导线截面	Wire range	20-10AWG	0.5-6mm ²
耐压	Withstanding Voltage	AC3000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	10-12mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M4, steel, Cr3+ Zn plated	
方盒	Cage	Brass, Nickel Plated	

认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P/2P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	24A
导线截面	Wire range	24-14AWG	0.5-2.5mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M3, steel, Cr3+ Zn plated	
方盒	Cage	-	

产品照片
Product Photo



XY263






XY264



XY265

产品图纸
Product Plah



认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P	
产品间距	Pitch	13.0mm(.512")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	20A	32A
导线截面	Wire range	20-12AWG	0.75-4mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	1.2N.m(10.5Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	8-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M4, steel, Cr3+ Zn plated	
方盒	Cage	-	

认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P-3P	
产品间距	Pitch	7.5mm(.295")	
额定电压	Voltage Rating	300V	450V
额定电流	Current Rating	30A	32A
导线截面	Wire range	20-10AWG	0.5-4mm ²
耐压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	10-12mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M3, steel, Cr3+ Zn plated	
方盒	Cage	Brass, Nickel Plated	

认证	Certification		
标准	Standard	UL	IEC
极数	Poles	1P	
产品间距	Pitch	12.5mm(.492")	
额定电压	Voltage Rating	300V	250V
额定电流	Current Rating	10A	10A
导线截面	Wire range	20-10AWG	0.5-4mm ²
耐压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.8N.m(7.0Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	10-12mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M3.5, steel, Cr3+ Zn plated	
方盒	Cage	Brass, Nickel Plated	

1 接线端子
2 接线端子
3 接线端子
4 M3.5 螺帽
5 接线端子
6 接线端子
7 接线端子
8 接线端子
9 接线端子
10 电筒线
11 线材

TRANSFORMER TERMINAL BLOCK

产品照片
Product Photo



XY266






XY267



XY268

产品图纸
Product Plah




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P/3P	
产品间距	Pitch	9.5mm(.374")	
额定电压	Voltage Rating	600V	250V
额定电流	Current Rating	15A	24A
导线截面	Wire range	20-12AWG	0.5-2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min	
额定扭矩	Rated torque	0.8N.m(7.0Lb-In.)	
环境温度	Ambient temperature	-40℃~+105℃	
剥线长度	Strip length	8-10mm	
塑件	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	Brass, Tin Plated	
螺丝	Screws	M3.5, steel, Cr3+ Zn plated	
方盒	Cage	-	

Feed Through Terminal Blocks

贯通式接线端子

ISO9001 ISO14001 CB RoHS REACH

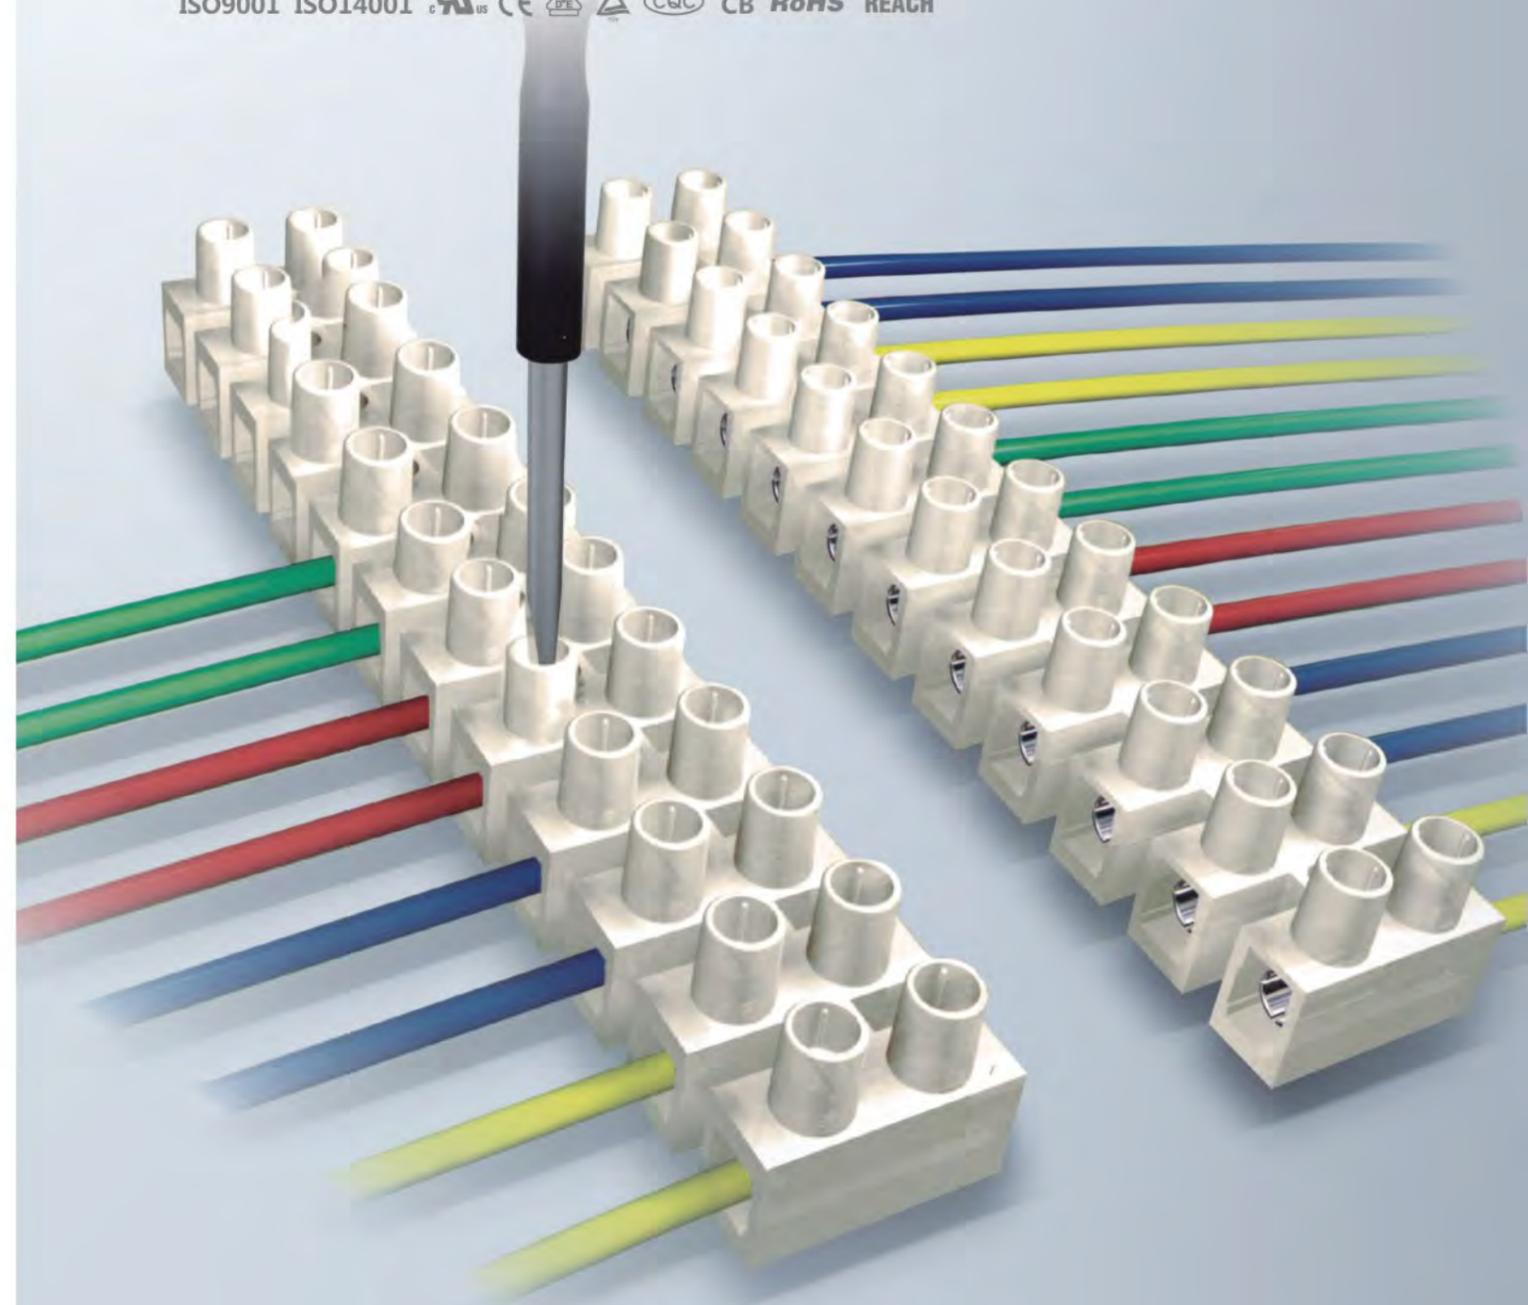

① PCB螺钉式 接线端子
② 插拔式 接线端子
③ PCB弹片式 接线端子
④ MCS多用途 连接器
⑤ 变压器 接线端子
⑥ 贯通式 接线端子
⑦ 螺钉式 接线端子
⑧ UK轨道式 接线端子
⑨ 接插件
⑩ 电脑线
⑪ 线材

FEED THROUGH TERMINAL BLOCKS

ISO9001 ISO14001



产品照片 Product Photo		XY800		XY800H		XY800W	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-12P		2P-12P		2P-12P	
产品间距	Pitch	8.0mm(.315")		8.0mm(.315")		8.0mm(.315")	
额定电压	Voltage Rating	300V	450V	300V	450V	300V	450V
额定电流	Current Rating	15A	32A	15A	32A	15A	24A
导线截面	Wire range	20-12AWG	0.5-4.0mm ²	20-12AWG	0.5-4.0mm ²	20-14AWG	0.5-2.5mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		-		Stainless Steel	
触点材料	Contact	-		-		-	
螺丝	Screws	M2.5,steel,A3,Zn plated		M2.5,steel,A3,Zn plated		M2.5,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated	

产品照片 Product Photo		XY801W		XY801HW		XY802	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-12P		2P-12P		2P-12P	
产品间距	Pitch	10.0mm(.394")		10.0mm(.394")		12.0mm(.473")	
额定电压	Voltage Rating	300V	450V	300V	450V	300V	750V
额定电流	Current Rating	20A	32A	20A	32A	30A	57A
导线截面	Wire range	18-12AWG	0.5-4.0mm ²	18-12AWG	0.5-4.0mm ²	14-10AWG	2.5-10.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)		0.6N.m(5.3Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel		Stainless Steel		-	
触点材料	Contact	-		-		-	
螺丝	Screws	M3,steel,A3,Zn plated		M3,steel,A3,Zn plated		M3.5,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated	

产品照片 Product Photo		XY800HW		XY801		XY801H	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-12P		2P-12P		2P-12P	
产品间距	Pitch	8.0mm(.315")		10.0mm(.394")		10.0mm(.394")	
额定电压	Voltage Rating	300V	450V	300V	450V	300V	450V
额定电流	Current Rating	15A	24A	20A	41A	20A	41A
导线截面	Wire range	20-14AWG	0.5-2.5mm ²	18-10AWG	1-6.0mm ²	18-10AWG	1-6.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)		0.5N.m(4.4Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel		-		-	
触点材料	Contact	-		-		-	
螺丝	Screws	M2.5,steel,A3,Zn plated		M3,steel,A3,Zn plated		M3,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated	

产品照片 Product Photo		XY802H		XY802W		XY802HW	
产品图纸 Product Plah							
认证	Certification						
标准	Standard	UL	IEC	UL	IEC	UL	IEC
极数	Poles	2P-12P		2P-12P		2P-12P	
产品间距	Pitch	12.0mm(.473")		12.0mm(.473")		12.0mm(.473")	
额定电压	Voltage Rating	300V	750V	300V	750V	300V	750V
额定电流	Current Rating	30A	57A	30A	41A	30A	41A
导线截面	Wire range	14-10AWG	2.5-10.0mm ²	14-10AWG	2.5-6.0mm ²	14-10AWG	2.5-6.0mm ²
耐电压	Withstanding Voltage	AC2000V/Min		AC2000V/Min		AC2000V/Min	
额定扭矩	Rated torque	0.6N.m(5.3Lb-In.)		0.6N.m(5.3Lb-In.)		0.6N.m(5.3Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C		-40°C~+105°C		-40°C~+105°C	
剥线长度	Strip length	-		-		-	
塑件	Housing	PA66 (UL 94V-0)		PA66 (UL 94V-0)		PA66 (UL 94V-0)	
弹片	Spring	-		Stainless Steel		Stainless Steel	
触点材料	Contact	-		-		-	
螺丝	Screws	M3.5,steel,A3,Zn plated		M3.5,steel,A3,Zn plated		M3.5,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated		Steel,Cr3+ Zn plated or Brass,Nickel Plated	

FEED THROUGH TERMINAL BLOCKS

ISO9001 ISO14001 CB RoHS REACH



产品照片
Product Photo



XY803






XY803W



XY804

产品图纸
Product Plah




认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	13.5mm(.531")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	48A	57A
导线截面	Wire range	12-8AWG	10.0mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.8N.m(7.06Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑料	Housing	PA66 (UL 94V-0)	
弹片	Spring	-	
触点材料	Contact	-	
螺丝	Screws	M4,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated	



ELCART DISTRIBUTION SPA
VIA BUONARROTI 46
20093 COLOGNO MONZESE (MI)

mail industria@elcart.it
tel. 02/25.11.73.10

visita il nostro sito: www.elcart.com

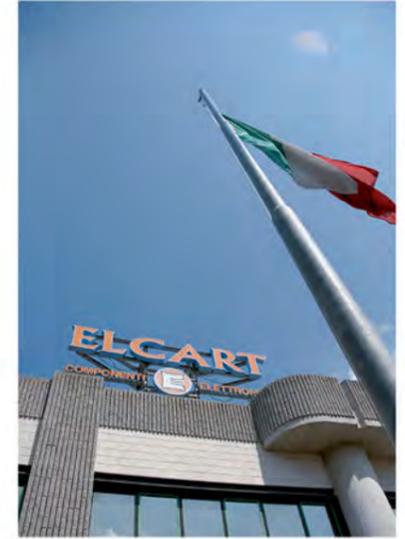

产品照片
Product Photo



XY804W






XY806A



XY806B

产品图纸
Product Plah



认证	Certification	UL	IEC
标准	Standard	UL	IEC
极数	Poles	2P-12P	
产品间距	Pitch	14.5mm(.571")	
额定电压	Voltage Rating	300V	750V
额定电流	Current Rating	60A	76A
导线截面	Wire range	8-6AWG	16.0mm ²
耐电压	Withstanding Voltage	AC2500V/Min	
额定扭矩	Rated torque	0.8N.m(7.06Lb-In.)	
环境温度	Ambient temperature	-40°C~+105°C	
剥线长度	Strip length	-	
塑料	Housing	PA66 (UL 94V-0)	
弹片	Spring	Stainless Steel	
触点材料	Contact	-	
螺丝	Screws	M5,steel,A3,Zn plated	
方盒	Cage	Steel,Cr3+ Zn plated or Brass,Nickel Plated	

