

**POWER SUPPLY SPECIFICATION**

MODEL NO.	13/00140-00	ISSUE DATE	2020-02-20
CUSTOMER		REF. NO.	

**INPUT**

INPUT VOLTAGE	100 to 240 Vac
INPUT FREQUENCY	60 / 50 Hz
NO LOAD POWER CONSUMPTION	<0.1W
INPUT FULL LOAD CURRENT (at 100 Vac)	550mA

**OUTPUT**

OUTPUT VOLTAGE (DC)	24.0V
OUTPUT CURRENT	1.12A

**OVERALL PERFORMANCE**

TOTAL OUTPUT POWER	26.88W Max
AVERAGE ACTIVE EFFICIENCY	Min 86.6% (for 24.0V)
EFFICIENCY AT LOW LOAD (10%)	Min 76.6%

**PROTECTION**

■ OVER CURRENT PROTECTION	■ SHORT CIRCUIT PROTECTION
■ OVER VOLTAGE PROTECTION	■ L.P.S (Limits for power source)
■ OVER POWER PROTECTION	□ AUTOMATIC THERMAL PROTECTION

**HI-POT**

INPUT TO OUTPUT	3000Vac 5 mA 50 Hz
INPUT TO CASE	3000Vac 5 mA 50Hz
OUTPUT TO CASE	500 Vac 5 mA 50Hz
ISOLATION RESISTANCE	100 M Ohms I/P-O/P I/P/Enclosure
APPLIANCE	Class II

**ENVIRONMENTAL**

OPERATING TEMPERATURE	0 °C to 25 °C
STORAGE TEMPERATURE	-20 °C to 60 °C
OPERATING HUMIDITY	20%-85% RH. NON-CONDENSING
STORAGE HUMIDITY	10%-90% RH. NON-CONDENSING

**SAFETY STANDARDS**

SAFETY STANDARDS	EN 61558-2-16:2009+A1:2013 conjunction with EN IEC 61558-1:2019
EMC STANDARDS	EN IEC 61204-3:2018

**RELIABILITY**

MTBF	30000 Hours min
BURN-IN	4 Hours 25°C, full load, 220Vac, 50Hz

**MECHANICAL SPECIFICATION**


DIMENSION	87.5 mm(L) x 51.0 mm(W) x 40.1mm(H) (excluded plug) 87.5 mm(L) x 51.0 mm(W) x 77.4mm(H) (included plug)
WEIGHT	168 g MAX exclude packing
INPUT PLUG	Direct plug-in EU type
OUTPUT CORD	PVC, Length 1.8m

## POWER SUPPLY SPECIFICATION

MODEL NO.	13/00140-00	ISSUE DATE	2020-02-20
CUSTOMER		REF. NO.	

OUTPUT PLUG	Depends on client request
-------------	---------------------------

## Appearance

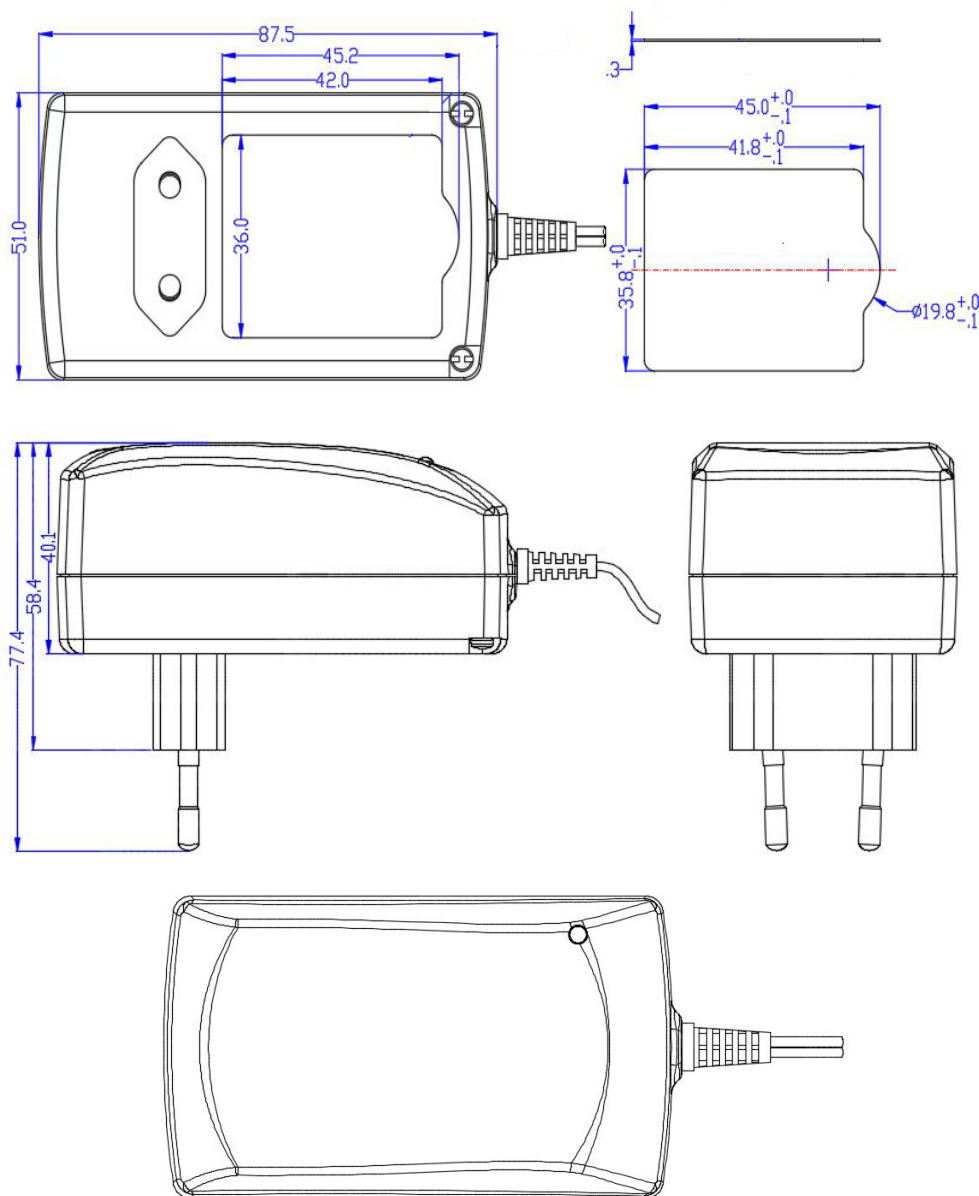

## User information ex art. 26 D. 49/2014

The symbol labelled on the appliance (Annex IX D. 49/2014) indicates that the rubbish is subject to "separate collection" and it has been placed on the Italian market after the December 31, 2010.

The user must therefore assign or (have collected) the rubbish to a treatment facility according to indications by the local administration, or hand it over to the reseller in exchange for an equivalent new product. The separate collection of the rubbish and the subsequent treatment, recycling and disposal operations encourage the production of appliances made with recycled materials and reduce negative effects on health and the environment caused by improper treatment of rubbish.

In the case of very small WEEE (no external dimension more than 25 cm), the user is eligible to get free of charge assignation to retail shops with sales areas relating to EEE of at least 400 m<sup>2</sup>.

IMPORTED AND DISTRIBUTED BY:  
ELCART DISTRIBUTION SPA  
Via Michelangelo Buonarroti, 46  
20093 COLOGNO MONZESE (MI)  
ITALY

[www.elcart.com](http://www.elcart.com) - [info@elcart.it](mailto:info@elcart.it)

Made in China



ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY  
Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: [www.elcart.com](http://www.elcart.com) e-mail: [tecnico@elcart.it](mailto:tecnico@elcart.it)

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.  
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.  
La divulgación de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vínculo de parte de Elcart respecto a las prestaciones y uso del producto.